

Specifications

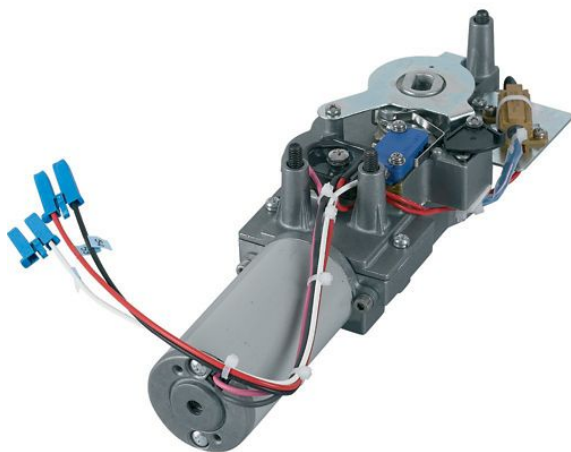


Photo is representative

Eaton 184264

Eaton Moeller series IZMX/INX - ACB. Motor operator 208-240 VAC/DC, 40

General specifications

PRODUCT NAME	Eaton Moeller series IZMX/INX motor operator
CATALOG NUMBER	184264
MODEL CODE	IZMX-M40-230AD-1
EAN	4015081784172
PRODUCT LENGTH/DEPTH	200 mm
PRODUCT HEIGHT	100 mm
PRODUCT WIDTH	150 mm
PRODUCT WEIGHT	0.907 kg
COMPLIANCES	RoHS conform

Additional information

ACCESSORY/SPARE PART TYPE

Remote switching

Delivery programme

SPECIAL FEATURES

- Signalling switch for "Spring-operated stored energy mechanism tensioned" message is included as standard.
- Switching frequency = 60/h
- The motor automatically tensions the spring force storage mechanism for remote or local actuation.
- Retrofitting kit
- The retrofit kit includes the required SEC control cable terminals.

TYPE	Accessory
USED WITH	IZMX40... INX40...

Design verification to IEC/EN 61439 - technical data

**AMBIENT OPERATING
TEMPERATURE - MAX** 70 °C

**AMBIENT OPERATING
TEMPERATURE - MIN** -25 °C

Technical data - electrical

**CONTROL VOLTAGE
OPERATING RANGE** 220 - 250 V DC
0.85 - 1.1 x Us
208 - 240 V AC (50/60 Hz)

**NECESSARY TIME FOR
CHARGING SPRING-
OPERATED STORED
ENERGY MECHANISM AT
1 X US** 6 s AC 50/60 Hz
6 s DC

POWER CONSUMPTION 400 VA AC 50/60 Hz
250 W DC

**RATED CONTROL SUPPLY
VOLTAGE (US) AT AC, 50
HZ - MAX** 240 V

**RATED CONTROL SUPPLY
VOLTAGE (US) AT AC, 50
HZ - MIN** 208 V

**RATED CONTROL SUPPLY
VOLTAGE (US) AT AC, 60
HZ - MAX** 240 V

**RATED CONTROL SUPPLY
VOLTAGE (US) AT AC, 60
HZ - MIN** 208 V

RATED CONTROL SUPPLY VOLTAGE (US) AT DC - MAX	250 V
RATED CONTROL SUPPLY VOLTAGE (US) AT DC - MIN	220 V
RATED OPERATIONAL CURRENT	1 A DC 1.5 A AC 50/60 Hz
STARTING CURRENT RATING	4.5 A AC 50/60 Hz, 4 A DC
VOLTAGE TYPE	AC/DC

Technical data - mechanical

NUMBER OF ACTUATION PER MINUTE - MAX	3
SWITCH DRIVE TYPE	Motor drive

Resources

CATALOGUES	eaton-acb-izm63-catalog-ca0135003en-en-us.pdf
DRAWINGS	eaton-circuit-breaker-izmx-inx-motor-operator-3d-drawing-002.eps
ECAD MODEL	ETN.IZMX-M40-230AD-1
INSTALLATION INSTRUCTIONS	eaton-izmx16-40-spring-release-latch-check-il0131088en-us.pdf
INSTALLATION VIDEOS	Air Circuit Breakers Series IZMX

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



Eaton Corporation plc Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2026 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

