


Specifications

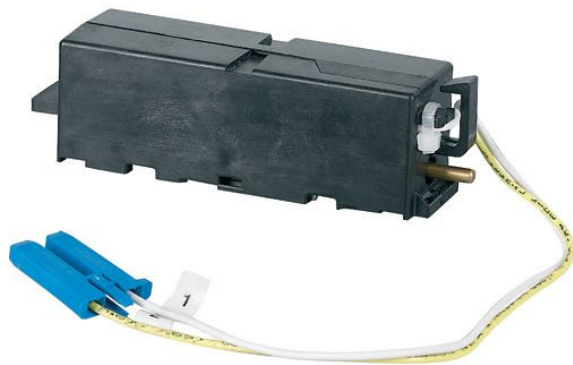

Eaton 184266

Eaton Moeller series IZMX/INX - ACB. Shunt release 24 VDC, 1

General specifications

PRODUCT NAME	Eaton Moeller series IZMX/INX shunt release
CATALOG NUMBER	184266
MODEL CODE	IZMX-ST24DC-1
EAN	4015081784189
PRODUCT LENGTH/DEPTH	150 mm
PRODUCT HEIGHT	100 mm
PRODUCT WIDTH	100 mm
PRODUCT WEIGHT	0.113 kg
COMPLIANCES	RoHS conform

Additional information

ACCESSORY/SPARE PART TYPE

Remote switching

Delivery programme

SPECIAL FEATURES

- Can be combined with an undervoltage release or a second shunt release.
- Retrofitting kit
- Limited to 3/min due to the high pick-up current for 35 ms.
- Please note - the circuit-breaker's switching frequency = 60/h
- The retrofit kit includes the required SEC control cable terminals.

SUITABLE FOR	Off-load switch Power circuit breaker Overload relay
TYPE	Accessory
USED WITH	INX16..., INX40... IZMX16..., IZMX40...

Design verification to IEC/EN 61439 - technical data

**AMBIENT OPERATING
TEMPERATURE - MAX** 70 °C

**AMBIENT OPERATING
TEMPERATURE - MIN** -25 °C

Technical data - electrical

CIRCUIT BREAKER TOTAL SWITCHING TIME	30 ms (Us = 100%) (IZMX16..., INX16...) 35 ms (Us = 100%) (IZMX40..., INX40...)
CONTROL VOLTAGE OPERATING RANGE	0.7 - 1.1 x Us 24 V DC
CURRENT RATING - MAX	0.18 A (maximum holding current)
ELECTRIC CONNECTION TYPE	Flat plug-in connection
PICK-UP POWER CONSUMPTION AT 35 MS - MAX	500 VA/W
POWER CONSUMPTION	5 VA/W AC/DC
RATED CONTROL SUPPLY VOLTAGE (US) AT DC - MAX	24 V
RATED CONTROL SUPPLY VOLTAGE (US) AT DC - MIN	24 V
RATED OPERATIONAL CURRENT	0.18 A (maximum holding current)

STARTING CURRENT RATING	19 A (35 ms)
VOLTAGE TYPE	DC

Technical data - mechanical

**NUMBER OF ACTUATION
PER MINUTE - MAX** 3

**NUMBER OF CONTACTS
(CHANGE-OVER
CONTACTS)** 0

**NUMBER OF CONTACTS
(NORMALLY CLOSED
CONTACTS)** 0

**NUMBER OF CONTACTS
(NORMALLY OPEN
CONTACTS)** 0

Resources

CATALOGUES [eaton-acb-izm63-catalog-ca0135003en-en-us.pdf](#)

DRAWINGS [eaton-circuit-breaker-izmx-inx-acb-3d-drawing-010.eps](#)

ECAD MODEL [DA-CE-ETN.IZMX-ST24DC-1](#)

INSTALLATION INSTRUCTIONS [eaton-izmx16-izmx40-uvr-st-ots-il0131087en-z.pdf](#)

INSTALLATION VIDEOS [Air Circuit Breakers Series IZMX](#)

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



Eaton Corporation plc Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2026 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

