

EUROTUBI
PRESSFITTING®
SYSTEM

Press and forget

Made in Italy



STAINLESS STEEL 316L - STAINLESS STEEL 316L GAS - CARBON STEEL

PROFILE




Data Sheet 28
March 2019



INTERNATIONAL ACCREDITATIONS

[March 2019]



PROFILE
M

The quality of used materials and the adoption of a rigorous quality control allowed Eurotubi Pressfitting system to obtain the conformity with the most severe international certifications.

* Approval obtained directly by our distributor

** Approved range from Ø15 to Ø108 mm

*** VdS approved range from Ø22 to Ø108 mm, valid only for the combined use of Eurotubi pipes and fittings.



EUROTUBI EUROPA srl
via Croce Rossa Italiana, 12
20834 Nova Milanese (MB)
ITALY

Tel. +39 0362 365068
Fax +39 0362 41099
www.eurotubieuropa.it
info@eurotubieuropa.it

STAINLESS STEEL AISI 316L **

	Germany		
	France		
	Austria		
	Norway		
	Sweden		
	Netherlands		
	Switzerland		
	Denmark		
	Russia		
	Italy		
	Czech Rep.		
	Australia		
	Hungary		
	Poland		
	USA		

STAINLESS STEEL GAS AISI 316L

	Germany	
	Austria	

CARBON STEEL

	Germany	
	France	
	Sweden	
	Russia	
	Czech Rep.	
	Hungary	
	Poland	
	Australia	

CUPRONICKEL

	Italy	
--	-------	--


INDEX

	STAINLESS STEEL AISI 316L	page 3
	STAINLESS STEEL GAS AISI 316L	page 15
	CARBON STEEL	page 22
	ACCESSORIES	page 32
	PIPES	page 34




The perfect functioning of the products included in this catalogue is bound to the observance of each country's legislation and to the instructions included in the updated version of the **Technical Manual (ITA-ENG)**, available on website www.eurotubieuropa.it

COUPLING




Part. No.	d	L	Z	weight gramm	min. lot
S10AB-LBP	12	42	6	24	100
S10AC-LBP	15	52	10	40	100
S10AD-LBP	18	52	10	46	100
S10AE-LBP	22	59	13	62	100
S10AF-LBP	28	61	13	78	100
S10AG-LBP	35	72	18	107	60
S10AH-LBP	42	88	15	148	30
S10AJ-LBP	54	98	16	210	30
S10AK	76,1	142	32	594	5
S10AL	88,9	163	37	792	5
S10AM	108	192	38	1.144	5

SLIP COUPLING



Part. No.	d	L	E	weight gramm	min. lot
S11AB-LBP	12	56	20	33	100
S11AC-LBP	15	71	24	52	100
S11AD-LBP	18	77	25	63	50
S11AE-LBP	22	82	27	84	50
S11AF-LBP	28	90	28	110	50
S11AG-LBP	35	99	31	151	50
S11AH-LBP	42	126	35	209	30
S11AJ-LBP	54	144	40	322	20
S11AK	76,1	230	60	927	5
S11AL	88,9	258	70	1.208	5
S11AM	108	305	80	1.727	5

REDUCER WITH PLAIN END




Part. No.	d - d1	L	H	weight gramm	min. lot
S12CB-LBP	15-12	53	35	29	100
S12DB-LBP	18-12	61	43	37	100
S12DC-LBP	18-15	55	34	39	100
S12EB-LBP	22-12	63	45	37	100
S12EC-LBP	22-15	60	39	45	100
S12ED-LBP	22-18	57	36	46	100
S12FC-LBP	28-15	72	51	56	80
S12FD-LBP	28-18	77	56	61	80
S12FE-LBP	28-22	67	44	64	100
S12GC-LBP	35-15	82	61	84	30
S12GD-LBP	35-18	87	66	90	30
S12GE-LBP	35-22	83	60	88	80
S12GF-LBP	35-28	73	49	88	80
S12HC-LBP	42-15	91	70	114	20
S12HD-LBP	42-18	96	75	118	20
S12HE-LBP	42-22	87	64	116	30
S12HF-LBP	42-28	98	74	126	30
S12HG-LBP	42-35	79	52	114	30
S12JC-LBP	54-15	110	89	180	15
S12JD-LBP	54-18	113	92	188	15
S12JE-LBP	54-22	107	84	184	15
S12JF-LBP	54-28	99	75	185	20
S12JG-LBP	54-35	128	101	206	20
S12JH-LBP	54-42	97	65	179	20
S12KH-LBP	76,1-42	151	119	456	5
S12KJ-LBP	76,1-54	140	103	458	5
S12LJ-LBP	88,9-54	156	119	600	5
S12LK	88,9-76,1	156	101	682	5
S12MJ-LBP	108-54	204	167	876	5
S12MK	108-76,1	196	141	954	5
S12ML	108-88,9	190	127	995	5

BEND 90°



$R = 1,5 d$



$R = 1,2 d$


Part. No.	d	L	Z	weight gramm	min. lot
S20AC-LBP	15	48	27	56	100
S20AD-LBP	18	53	32	70	100
S20AE-LBP	22	60	37	100	100
S20AF-LBP	28	71	47	144	60
S20AG-LBP	35	87	60	206	60
S20AH-LBP	42	115	83	330	30
S20AJ-LBP	54	142	105	503	20

Part. No.	d	L	Z	weight gramm	min. lot
S20ZB-LBP	12	42	24	36	100
S20ZG-LBP	35	75	48	172	60
S20ZH-LBP	42	89	57	250	30
S20ZJ-LBP	54	107	70	398	20
S20ZK	76,1	150	95	966	5
S20ZL	88,9	174	111	1.312	5
S20ZM	108	215	138	1.948	5

BEND 90° WITH PLAIN END



$R = 1,5 d$



$R = 1,2 d$


Part. No.	d	L	H	Z	weight gramm	min. lot
S21AC-LBP	15	48	56	27	60	100
S21AD-LBP	18	53	62	32	72	100
S21AE-LBP	22	60	68	37	100	100
S21AF-LBP	28	71	80	47	144	50
S21AG-LBP	35	87	93	60	206	50
S21AH-LBP	42	115	125	83	310	20
S21AJ-LBP	54	142	149	105	394	20

Part. No.	d	L	H	Z	weight gramm	min. lot
S21ZB-LBP	12	42	51	24	37	100
S21ZG-LBP	35	75	83	48	166	50
S21ZH-LBP	42	89	97	57	258	20
S21ZJ-LBP	54	107	116	70	376	20
S21ZK	76,1	150	165	95	996	5
S21ZL	88,9	174	190	111	1.316	5
S21ZM	108	215	238	138	1.932	5

BEND 45°



$R = 1,5 d$



$R = 1,2 d$


Part. No.	d	L	Z	weight gramm	min. lot
S22AC-LBP	15	37	16	51	100
S22AD-LBP	18	38	17	58	100
S22AE-LBP	22	44	21	80	100
S22AF-LBP	28	51	27	118	50
S22AG-LBP	35	59	32	165	50
S22AH-LBP	42	77	45	258	20
S22AJ-LBP	54	88	51	374	20

Part. No.	d	L	Z	weight gramm	min. lot
S22ZB-LBP	12	32	14	34	100
S22ZG-LBP	35	49	22	162	50
S22ZH-LBP	42	63	31	216	20
S22ZJ-LBP	54	75	38	304	20
S22ZK	76,1	98	43	773	5
S22ZL	88,9	112	49	1.008	5
S22ZM	108	138	61	1.524	5

BEND 45° WITH PLAIN END



$R = 1,5 d$




$R = 1,2 d$

Part. No.	d	L	H	Z	weight gramm	min. lot
S23AC-LBP	15	37	48	16	60	100
S23AD-LBP	18	38	45	17	60	100
S23AE-LBP	22	44	53	21	80	100
S23AF-LBP	28	51	60	27	115	50
S23AG-LBP	35	59	66	32	166	50
S23AH-LBP	42	77	80	45	258	20
S23AJ-LBP	54	88	97	51	370	20


Part. No.	d	L	H	Z	weight gramm	min. lot
S23ZB-LBP	12	32	41	14	33	100
S23ZG-LBP	35	49	51	22	128	50
S23ZH-LBP	42	63	72	31	310	20
S23ZJ-LBP	54	75	83	38	308	20
S23ZK	76,1	98	117	43	758	5
S23ZL	88,9	112	131	49	996	5
S23ZM	108	138	154	61	1.468	5

ADAPTOR WITH FEMALE THREAD




Part. No.	d - Rp	L	Z	weight gramm	min. lot
S80NB-LBP	12-Rp $\frac{3}{8}$	56	28	57	100
S80PB-LBP	12-Rp $\frac{1}{2}$	52	16	49	100
S80PC-LBP	15-Rp $\frac{1}{2}$	53	20	53	100
S80QC-LBP	15-Rp $\frac{3}{4}$	67	33	79	60
S80PD-LBP	18-Rp $\frac{1}{2}$	51	18	53	100
S80QD-LBP	18-Rp $\frac{3}{4}$	57	23	78	100
S80PE-LBP	22-Rp $\frac{1}{2}$	52	17	78	100
S80QE-LBP	22-Rp $\frac{3}{4}$	56	20	79	100
S80RE-LBP	22-Rp1	70	31	108	80
S80QF-LBP	28-Rp $\frac{3}{4}$	73	36	105	80
S80RF-LBP	28-Rp1	62	22	105	80
S80SF-LBP	28-Rp1 $\frac{1}{4}$	80	39	188	50
S80RG-LBP	35-Rp1	81	38	134	50
S80SG-LBP	35-Rp1 $\frac{1}{4}$	72	28	174	50
S80TG-LBP	35-Rp1 $\frac{1}{2}$	83	39	264	50
S80SH-LBP	42-Rp1 $\frac{1}{4}$	94	45	220	20
S80TH-LBP	42-Rp1 $\frac{1}{2}$	74	25	274	30
S80TJ-LBP	54-Rp1 $\frac{1}{2}$	106	52	396	20
S80VJ-LBP	54-Rp2	84	25	352	20

ADAPTOR WITH MALE THREAD




Part. No.	d - R	L	Z	weight gramm	min. lot
S81NB-LBP	12-R $\frac{3}{8}$	56	38	49	100
S81PB-LBP	12-R $\frac{1}{2}$	52	34	56	100
S81NC-LBP	15-R $\frac{3}{8}$	50	29	47	100
S81PC-LBP	15-R $\frac{1}{2}$	52	31	53	100
S81QC-LBP	15-R $\frac{3}{4}$	64	43	70	50
S81PD-LBP	18-R $\frac{1}{2}$	52	31	57	100
S81QD-LBP	18-R $\frac{3}{4}$	54	33	67	50
S81PE-LBP	22-R $\frac{1}{2}$	68	45	73	100
S81QE-LBP	22-R $\frac{3}{4}$	58	35	75	100
S81RE-LBP	22-R1	72	49	120	100
S81QF-LBP	28-R $\frac{3}{4}$	73	49	102	80
S81RF-LBP	28-R1	62	38	118	100
S81SF-LBP	28-R1 $\frac{1}{4}$	79	55	172	50
S81RG-LBP	35-R1	82	55	150	50
S81SG-LBP	35-R1 $\frac{1}{4}$	70	43	170	50
S81TG-LBP	35-R1 $\frac{1}{2}$	84	57	204	30
S81SH-LBP	42-R1 $\frac{1}{4}$	93	61	216	20
S81TH-LBP	42-R1 $\frac{1}{2}$	75	43	204	20
S81TJ-LBP	54-R1 $\frac{1}{2}$	105	68	284	20
S81VJ-LBP	54-R2	87	50	372	20
S81XK	76,1-R 2 $\frac{1}{2}$	125	70	804	5
S81YL	88,9-R 3	138	75	1.172	5

ADAPTOR WITH MALE THREAD AND PLAIN END




Part. No.	d - R	L	weight gramm	min. lot
S87PC	15-R $\frac{1}{2}$	70	48	100
S87PD	18-R $\frac{1}{2}$	70	48	100
S87QE	22-R $\frac{3}{4}$	75	76	100
S87RF	28-R1	75	110	80
S87SG	35-R1 $\frac{1}{4}$	80	173	80
S87TH	42-R1 $\frac{1}{2}$	91	212	50
S87VJ	54-R2	102	388	50

ADAPTOR WITH FEMALE THREAD AND PLAIN END




Part. No.	d - Rp	H	L	weight gramm	min. lot
S86PC	15-Rp $\frac{1}{2}$	136	148	72	100
S86PD	18-Rp $\frac{1}{2}$	136	148	82	100
S86QD	18-Rp $\frac{3}{4}$	135	148	106	100
S86PE	22-Rp $\frac{1}{2}$	140	152	132	100
S86QE	22-Rp $\frac{3}{4}$	139	152	120	100
S86RF	28-Rp1	94	110	126	80
S86SG	35-Rp1 $\frac{1}{4}$	93	110	220	80
S86TH	42-Rp1 $\frac{1}{2}$	93	110	294	50
S86VJ	54-Rp2	98	120	402	50

BEND ADAPTOR 90° WITH FEMALE THREAD

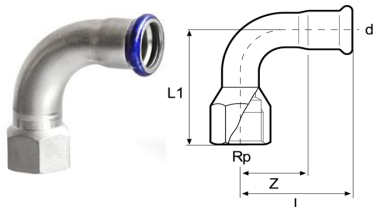


Part. No.	d - Rp	L	L1	Z	weight gramm	min. lot
S82PC-LBP	15-Rp $\frac{1}{2}$	48	58	27	76	20
S82PD-LBP	18-Rp $\frac{1}{2}$	53	59	32	86	20
S82QE-LBP	22-Rp $\frac{3}{4}$	60	68	37	124	20
S82RF-LBP	28-Rp1	71	81	47	176	20
S82SG-LBP	35-Rp1 $\frac{1}{4}$	87	95	60	284	15

BEND ADAPTOR 90° WITH MALE THREAD

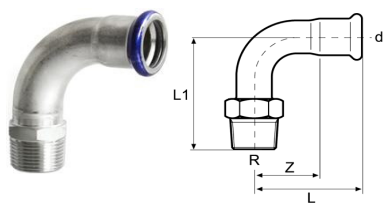


Part. No.	d - R	L	L1	Z	weight gramm	min. lot
S83PC-LBP	15-R $\frac{1}{2}$	48	58	27	78	20
S83PD-LBP	18-R $\frac{1}{2}$	53	61	32	86	20
S83QE-LBP	22-R $\frac{3}{4}$	60	69	37	124	20
S83RF-LBP	28-R1	71	81	47	188	20
S83SG-LBP	35-R1 $\frac{1}{4}$	87	94	60	276	15
S83TH-LBP	42-R1 $\frac{1}{2}$	115	116	83	390	15
S83VJ-LBP	54-R2	142	143	105	680	15

BEND ADAPTOR 45° WITH MALE THREAD

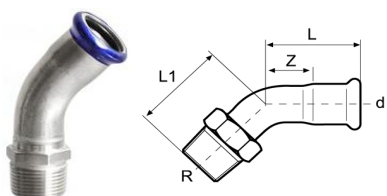


Part. No.	d - R	L	L1	Z	weight gramm	min. lot
S85PC-LBP	15-R $\frac{1}{2}$	37	38	16	65	20
S85PD-LBP	18-R $\frac{1}{2}$	38	46	17	71	20
S85QE-LBP	22-R $\frac{3}{4}$	44	51	21	100	20

**ELBOW ADAPTOR 90° WITH MALE
THREAD**

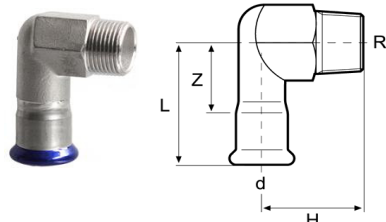


Part. No.	d - R	L	H	Z	weight gramm	min. lot
S31PC-LBP	15-R $\frac{1}{2}$	53	36	32	90	80
S31QC-LBP	15-R $\frac{3}{4}$	62	38	41	140	50
S31PD-LBP	18-R $\frac{1}{2}$	51	36	30	103	50
S31QD-LBP	18-R $\frac{3}{4}$	67	37	46	148	30
S31QE-LBP	22-R $\frac{3}{4}$	58	40	35	145	50
S31RF-LBP	28-R1	63	44	39	248	50
S31SG-LBP	35-R1 $\frac{1}{4}$	71	48	44	354	30
S31TH-LBP	42-R1 $\frac{1}{2}$	81	53	49	432	15
S31VJ-LBP	54-R2	92	59	55	720	15

**ELBOW ADAPTOR 90° WITH FEMALE
THREAD**

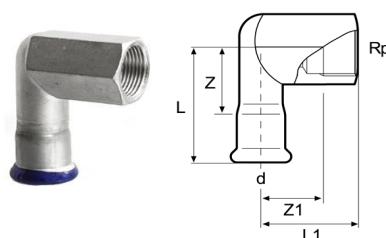


Part. No.	d - Rp	L	L1	Z	Z1	weight gramm	min. lot
S30PC-LBP	15-Rp $\frac{1}{2}$	53	36	32	24	119	80
S30PD-LBP	18-Rp $\frac{1}{2}$	52	39	31	27	122	60
S30QE-LBP	22-Rp $\frac{3}{4}$	57	46	34	33	184	50
S30RF-LBP	28-Rp1	71	54	47	38	340	50
S30SG-LBP	35-Rp1 $\frac{1}{4}$	72	62	45	45	492	30

**ELBOW ADAPTOR 90° WITH FEMALE
THREAD AND PLAIN END**

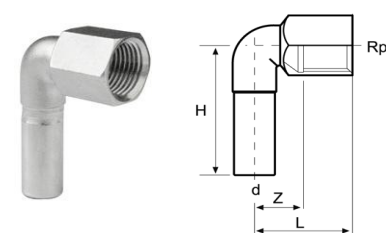


Part. No.	d - Rp	L	H	Z	weight gramm	min. lot
S34PC	15-Rp $\frac{1}{2}$	35	53	23	72	50

**90° FEMALE ELBOW WITH WALL
PLATE**

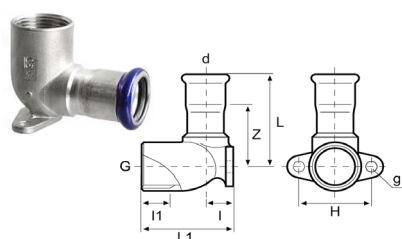


Part. No.	d - G (ISO 228)	L	L1	Z	I	I1	H	g	weight gramm	min. lot
S32PC-LBP	15-G $\frac{1}{2}$	46	43	25	12	12	34	5	102	80
S32PD-LBP	18-G $\frac{1}{2}$	47	44	26	13	12	34	6	99	60
S32QE-LBP	22-G $\frac{3}{4}$	52	51	29	16	13	40	6	153	60

**90° FEMALE ELBOW WITH LONG
WALL PLATE**

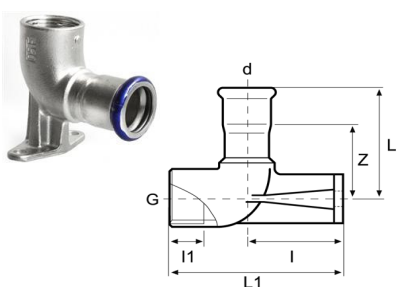


Part. No.	d - G (ISO 228)	L	I	L1	Z	I1	weight gramm	min. lot
S33PC-LBP	15-G $\frac{1}{2}$	46	36	65	25	12	156	50
S33PD-LBP	18-G $\frac{1}{2}$	47	36	65	26	12	146	50
S33QE-LBP	22-G $\frac{3}{4}$	52	32	65	29	13	178	50

T-PIECE EQUAL

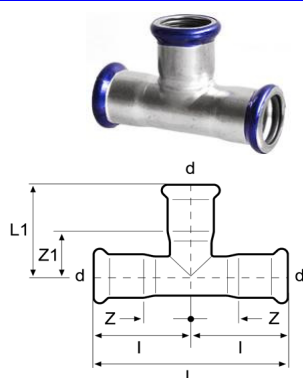

Part No.	d	L	L1	Z	Z1	I	weight gramm	min. lot
S40AB-LBP	12	56	33	10	15	28	45	100
S40AC-LBP	15	74	35	16	14	37	71	100
S40AD-LBP	18	80	35	19	14	40	84	100
S40AE-LBP	22	82	40	18	17	41	110	100
S40AF-LBP	28	92	45	22	21	46	146	80
S40AG-LBP	35	102	55	24	28	51	193	50
S40AH-LBP	42	118	61	27	29	59	278	20
S40AJ-LBP	54	142	72	34	35	71	406	20
S40AK	76,1	232	115	61	60	116	1.170	5
S40AL	88,9	262	127	68	64	131	1.556	5
S40AM	108	312	155	79	78	156	2.276	5


T-PIECE REDUCED

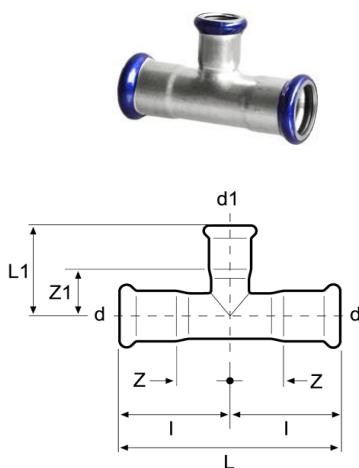

Part No.	d - d1 - d	L	L1	Z	Z1	I	weight gramm	min. lot
S41BC-LBP	15-12-15	74	34	16	16	37	66	100
S41BD-LBP	18-12-18	80	36	19	18	40	75	100
S41CD-LBP	18-15-18	80	36	19	15	40	84	100
S41BE-LBP	22-12-22	82	38	18	20	41	94	100
S41CE-LBP	22-15-22	82	39	18	18	41	100	100
S41DE-LBP	22-18-22	82	38	18	17	41	104	100
S41CF-LBP	28-15-28	92	42	22	21	46	132	80
S41DF-LBP	28-18-28	92	42	22	21	46	134	80
S41EF-LBP	28-22-28	92	45	22	22	46	140	80
S41CG-LBP	35-15-35	102	45	24	24	51	160	50
S41DG-LBP	35-18-35	102	45	24	24	51	164	50
S41EG-LBP	35-22-35	102	46	24	23	51	173	50
S41FG-LBP	35-28-35	102	48	24	24	51	176	50
S41CH-LBP	42-15-42	118	48	27	27	59	226	20
S41DH-LBP	42-18-42	118	48	27	27	59	228	20
S41EH-LBP	42-22-42	118	51	27	28	59	232	30
S41FH-LBP	42-28-42	118	53	27	29	59	241	30
S41GH-LBP	42-35-42	118	60	27	33	59	250	30
S41CJ-LBP	54-15-54	142	56	34	35	71	322	15
S41DJ-LBP	54-18-54	142	55	34	34	71	336	15
S41EJ-LBP	54-22-54	142	57	34	34	71	334	20
S41FJ-LBP	54-28-54	142	60	34	36	71	348	15
S41GJ-LBP	54-35-54	142	66	34	39	71	356	15
S41HJ-LBP	54-42-54	142	64	34	32	71	378	15
S41EK-LBP	76,1-22-76,1	232	68	61	45	116	936	5
S41FK-LBP	76,1-28-76,1	232	71	61	47	116	948	5
S41GK-LBP	76,1-35-76,1	232	75	61	48	116	962	5
S41HK-LBP	76,1-42-76,1	232	79	61	47	116	987	5
S41JK-LBP	76,1-54-76,1	232	80	61	43	116	996	5
S41EL-LBP	88,9-22-88,9	262	76	68	53	131	1.238	5
S41FL-LBP	88,9-28-88,9	262	76	68	52	131	1.182	5
S41GL-LBP	88,9-35-88,9	262	83	68	56	131	1.250	5
S41HL-LBP	88,9-42-88,9	262	85	68	53	131	1.266	5
S41JL-LBP	88,9-54-88,9	262	93	68	56	131	1.290	5
S41KL	88,9-76,1-88,9	262	116	68	61	131	1.144	5
S41EM-LBP	108-22-108	312	85	79	62	156	1.792	5
S41FM-LBP	108-28-108	312	88	79	64	156	1.798	5
S41GM-LBP	108-35-108	312	94	79	67	156	1.822	5
S41HM-LBP	108-42-108	312	96	79	64	156	1.820	5
S41JM-LBP	108-54-108	312	102	79	65	156	1.852	5
S41KM	108-76,1-108	312	125	79	70	156	2.014	5
S41LM	108-88,9-108	312	135	79	72	156	2.126	5


T-PIECE WITH FEMALE THREAD

Part. No.	d - Rp	L	L1	Z	Z1	I	weight gramm	min. lot
S42NB-LBP	12-Rp ³ / ₈ -12	56	34	10	19	28	77	100
S42PC-LBP	15-Rp ¹ / ₂ -15	74	37	16	25	37	84	100
S42PD-LBP	18-Rp ¹ / ₂ -18	80	39	19	27	40	99	80
S42QD-LBP	18-Rp ³ / ₄ -18	80	43	19	30	40	118	50
S42PE-LBP	22-Rp ¹ / ₂ -22	82	41	18	29	41	118	100
S42QE-LBP	22-Rp ³ / ₄ -22	82	41	18	28	41	130	80
S42PF-LBP	28-Rp ¹ / ₂ -28	92	44	22	32	46	146	80
S42QF-LBP	28-Rp ³ / ₄ -28	92	45	22	32	46	160	50
S42RF-LBP	28-Rp1-28	92	48	22	32	46	174	30
S42PG-LBP	35-Rp ¹ / ₂ -35	102	48	24	36	51	176	50
S42QG-LBP	35-Rp ³ / ₄ -35	102	48	24	35	51	194	50
S42SG-LBP	35-Rp1 ¹ / ₄ -35	102	57	24	40	51	272	20
S42PH-LBP	42-Rp ¹ / ₂ -42	118	46	27	34	59	249	20
S42QH-LBP	42-Rp ³ / ₄ -42	118	52	27	39	59	255	20
S42TH-LBP	42-Rp1 ¹ / ₂ -42	118	59	27	42	59	384	20
S42PJ-LBP	54-Rp ¹ / ₂ -54	142	55	34	43	71	350	15
S42QJ-LBP	54-Rp ³ / ₄ -54	142	58	34	45	71	360	15
S42VJ-LBP	54-Rp2-54	142	69	34	47	71	548	15
S42QK	76,1-Rp ³ / ₄ -76,1	232	68	61	55	116	1.258	5
S42VK	76,1-Rp2-76,1	232	81	61	59	116	1.144	5
S42QL	88,9-Rp ³ / ₄ -88,9	262	87	68	74	131	1.254	5
S42VL	88,9-Rp2-88,9	262	88	68	66	131	1.438	5
S42QM	108-Rp ³ / ₄ -108	312	86	79	73	156	1.812	5
S42VM	108-Rp2-108	312	98	79	76	156	1.992	5

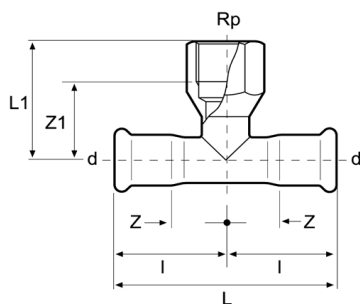


T-PIECE WITH MALE THREAD

Part. No.	d - R	L	L1	Z	Z1	I	weight gramm	min. lot
S43PC-LBP	15-R ¹ / ₂ -15	74	38	16	15	37	86	100
S43PD-LBP	18-R ¹ / ₂ -18	80	40	19	15	40	94	100
S43QE-LBP	22-R ³ / ₄ -22	82	43	18	17	41	126	100
S43RF-LBP	28-R1-28	92	50	22	21	46	188	80
S43SG-LBP	35-R1 ¹ / ₄ -35	102	56	24	28	51	258	50

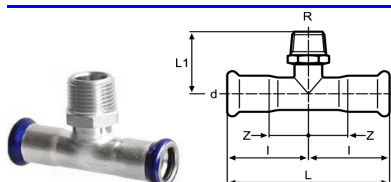


MISALIGNED T-PIECE

Part. No.	d - G (ISO 228)	L	L1	Z	Z1	H	I	I1	weight gramm	min. lot
S48PC-LBP	15-G ¹ / ₂	74	43	21	31	34	12	13	135	100
S48PD-LBP	18-G ¹ / ₂	80	43	21	33	34	12	13	140	100

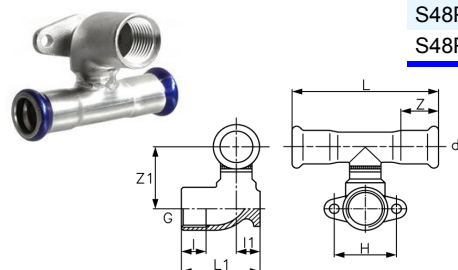


**DOUBLE TAP CONNECTOR 90°/90°
WITH FEMALE THREAD**

Part. No.	d - Rp	L	L1	I	I1	Z	H	g	weight gramm	min. lot
S36PC-LBP	15-Rp ¹ / ₂	56	44	15	12	35	39	5	166	50

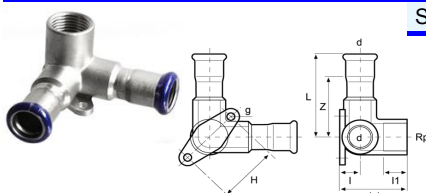


WELDING JOINT



Correct conditions of use have to be requested from our technical department

Part. No.	d	L	weight gramm	min. lot
S17AC-LBP	15	25	18	200
S17AD-LBP	18	25	22	200
S17AE-LBP	22	27	30	200
S17AF-LBP	28	30	39	150
S17AG-LBP	35	34	52	150
S17AH-LBP	42	38	72	100
S17AJ-LBP	54	44	102	100
S17AK	76	68	279	50
S17AL	89	78	392	50
S17AM	108	94	550	50


**FLANGE WITH PRESSING SOCKET
PN 16**

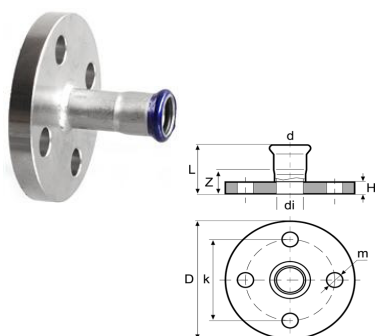

Part. No.	d	D	di	L	H	m	k	Z	weight gramm	min. lot
S52AC-LBP	15	95	14	59	11	14	65	33	572	20
S52AD-LBP	18	95	17	57	11	14	65	39	616	20
S52AE-LBP	22	105	21	59	12	14	75	39	792	20
S52AF-LBP	28	115	27	65	14	14	85	47	1.122	20
S52AG-LBP	35	140	32	70	15	18	100	52	1.770	20
S52AH-LBP	42	150	39	77	16	18	110	59	2.090	15
S52AJ-LBP	54	165	51	86	18	18	125	75	2.838	15
S52AK	76,1	185	72	126	18	18	145	71	3.637	5
S52AL	88,9	200	85	147	20	18	160	84	4.405	5
S52AM	108	220	104	167	20	18	180	90	5.360	5


Diameters 88,9 and 108 (PN 10/16) are with 8 holes

CAP




Part. No.	d	L	Z	weight gramm	min. lot
S50AC-LBP	15	37	16	28	100
S50AD-LBP	18	40	19	34	50
S50AE-LBP	22	41	18	45	50
S50AF-LBP	28	46	22	62	50
S50AG-LBP	35	51	24	78	50
S50AH-LBP	42	59	27	116	20
S50AJ-LBP	54	72	35	176	20
S50AK	76,1	95	40	412	5
S50AL	88,9	107	44	544	5
S50AM	108	127	50	813	5

PLUG




Part. No.	d	E	L	weight gramm	min. lot
S51AC	15	33	42	16	100
S51AD	18	33	40	18	50
S51AE	22	34	43	30	50
S51AF	28	36	47	42	50
S51AG	35	40	49	70	50
S51AH	42	44	55	96	20
S51AJ	54	49	62	144	20
S51AK	76,1	65	75	328	5
S51AL	88,9	72	90	480	5
S51AM	108	87	103	648	5

ADAPTOR WITH UNION NUT IN BRASS/STAINLESS STEEL AND EPDM FLAT SEAL




Part. No.	G - d (ISO 228)	nut	L	Z	weight gramm	min. lot
S60QC-LBP	G $\frac{3}{4}$ -15	BRASS	50	22	90	50
S60SC-LBP	G $1\frac{1}{4}$ -15	BRASS	52	20	190	15
S60QD-LBP	G $\frac{3}{4}$ -18	BRASS	36	8	74	50
S60RE-LBP	G1-22	BRASS	39	7	94	50
S60SF-LBP	G $1\frac{1}{4}$ -28	BRASS	44	10	168	50
S60TF-LBP	G $1\frac{1}{2}$ -28	BRASS	73	38	170	50
S60TG-LBP	G $1\frac{1}{2}$ -35	BRASS	48	11	260	20
S60UH-LBP	G $1\frac{3}{4}$ -42	BRASS	53	9	292	20
S60WJ-LBP	G $2\frac{3}{8}$ -54	BRASS	61	10	454	20
S61QC-LBP	G $\frac{3}{4}$ -15	ST. STEEL	51	22	90	50
S61SC-LBP	G $1\frac{1}{4}$ -15	ST. STEEL	52	20	90	15
S61QD-LBP	G $\frac{3}{4}$ -18	ST. STEEL	38	8	70	50
S61RE-LBP	G1-22	ST. STEEL	39	7	94	50
S61SF-LBP	G $1\frac{1}{4}$ -28	ST. STEEL	44	10	152	50
S61TF-LBP	G $1\frac{1}{2}$ -28	ST. STEEL	73	38	154	50
S61TG-LBP	G $1\frac{1}{2}$ -35	ST. STEEL	48	11	250	20
S61UH-LBP	G $1\frac{3}{4}$ -42	ST. STEEL	53	9	258	20
S61WJ-LBP	G $2\frac{3}{8}$ -54	ST. STEEL	61	10	404	20

ADAPTOR UNION WITH FEMALE THREAD, BRASS/STAINLESS STEEL NUT AND EPDM FLAT SEAL




Part. No.	d - R	nut	L	Z	weight gramm	min. lot
S62PC-LBP	15-Rp $\frac{1}{2}$	BRASS	73	41	140	15
S62QC-LBP	15-Rp $\frac{3}{4}$	BRASS	76	43	180	15
S62PD-LBP	18-Rp $\frac{1}{2}$	BRASS	59	27	120	15
S62QD-LBP	18-Rp $\frac{3}{4}$	BRASS	62	29	160	15
S62QE-LBP	22-Rp $\frac{3}{4}$	BRASS	63	28	184	15
S62RE-LBP	22-Rp1	BRASS	67	30	214	15
S62RF-LBP	28-Rp1	BRASS	71	33	376	15
S62SG-LBP	35-Rp $1\frac{1}{4}$	BRASS	77	34	470	15
S62TH-LBP	42-Rp $1\frac{1}{2}$	BRASS	82	33	516	15
S62VJ-LBP	54-Rp2	BRASS	95	37	948	15
S63PC-LBP	15-Rp $\frac{1}{2}$	ST. STEEL	73	41	142	15
S63QC-LBP	15-Rp $\frac{3}{4}$	ST. STEEL	76	43	182	15
S63PD-LBP	18-Rp $\frac{1}{2}$	ST. STEEL	59	27	126	15
S63QD-LBP	18-Rp $\frac{3}{4}$	ST. STEEL	62	29	162	15
S63QE-LBP	22-Rp $\frac{3}{4}$	ST. STEEL	63	28	186	15
S63RE-LBP	22-Rp1	ST. STEEL	67	30	216	15
S63RF-LBP	28-Rp1	ST. STEEL	71	33	356	15
S63SG-LBP	35-Rp $1\frac{1}{4}$	ST. STEEL	77	34	462	15
S63TH-LBP	42-Rp $1\frac{1}{2}$	ST. STEEL	82	33	484	15
S63VJ-LBP	54-Rp2	ST. STEEL	95	37	898	15

**ADAPTOR UNION WITH MALE
THREAD, BRASS/STAINLESS STEEL
NUT AND EPDM FLAT SEAL**




Part. No.	G - d (ISO 228)	nut	L	Z	weight gramm	min. lot
S64PC-LBP	15-R $\frac{1}{2}$	BRASS	77	56	150	15
S64QC-LBP	15-R $\frac{3}{4}$	BRASS	80	59	168	15
S64PD-LBP	18-R $\frac{1}{2}$	BRASS	63	42	129	15
S64QD-LBP	18-R $\frac{3}{4}$	BRASS	66	45	149	15
S64PE-LBP	22-R $\frac{1}{2}$	BRASS	67	44	225	15
S64QE-LBP	22-R $\frac{3}{4}$	BRASS	69	46	195	15
S64RE-LBP	22-R1	BRASS	73	50	237	15
S64RF-LBP	28-R1	BRASS	78	54	366	15
S64SG-LBP	35-R1 $\frac{1}{4}$	BRASS	85	59	495	15
S64TH-LBP	42-R1 $\frac{1}{2}$	BRASS	90	58	578	15
S64VJ-LBP	54-R2	BRASS	104	67	988	15
S65PC-LBP	15-R $\frac{1}{2}$	ST. STEEL	77	56	148	15
S65QC-LBP	15-R $\frac{3}{4}$	ST. STEEL	80	59	168	15
S65PD-LBP	18-R $\frac{1}{2}$	ST. STEEL	63	42	128	15
S65QD-LBP	18-R $\frac{3}{4}$	ST. STEEL	66	45	148	15
S65PE-LBP	22-R $\frac{1}{2}$	ST. STEEL	67	44	218	15
S65QE-LBP	22-R $\frac{3}{4}$	ST. STEEL	69	46	194	15
S65RE-LBP	22-R1	ST. STEEL	73	50	232	15
S65RF-LBP	28-R1	ST. STEEL	78	54	350	15
S65SG-LBP	35-R1 $\frac{1}{4}$	ST. STEEL	85	59	482	15
S65TH-LBP	42-R1 $\frac{1}{2}$	ST. STEEL	90	58	588	15
S65VJ-LBP	54-R2	ST. STEEL	104	67	936	15

**STRAIGHT UNION WITH PRESS
FITTINGS ON BOTH ENDS, SWIVEL
NUT IN BRASS/STAINLESS STEEL
AND EPDM FLAT SEAL**




Part. No.	d - R	nut	L	Z	weight gramm	min. lot
S66QC-LBP	G $\frac{3}{4}$ -15	BRASS	100	58	174	15
S66QD-LBP	G $\frac{3}{4}$ -18	BRASS	86	44	152	15
S66RE-LBP	G1-22	BRASS	94	48	212	15
S66SF-LBP	G1 $\frac{1}{4}$ -28	BRASS	101	53	358	15
S66TG-LBP	G1 $\frac{1}{2}$ -35	BRASS	109	56	532	15
S66UH-LBP	G1 $\frac{3}{4}$ -42	BRASS	119	55	606	15
S66WJ-LBP	G2 $\frac{3}{8}$ -54	BRASS	130	56	948	15
S68QC-LBP	G $\frac{3}{4}$ -15	ST. STEEL	100	58	172	15
S68QD-LBP	G $\frac{3}{4}$ -18	ST. STEEL	86	44	146	15
S68RE-LBP	G1-22	ST. STEEL	94	48	214	15
S68SF-LBP	G1 $\frac{1}{4}$ -28	ST. STEEL	101	53	340	15
S68TG-LBP	G1 $\frac{1}{2}$ -35	ST. STEEL	109	56	524	15
S68UH-LBP	G1 $\frac{3}{4}$ -42	ST. STEEL	119	55	574	15
S68WJ-LBP	G2 $\frac{3}{8}$ -54	ST. STEEL	130	56	898	15

BEND 15° WITH PLAIN ENDS

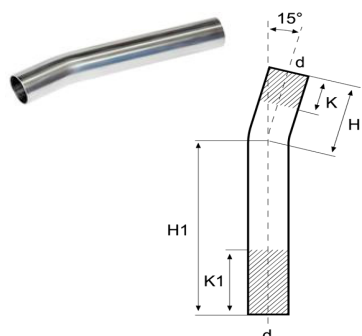


Part. No.	d	H1	H	K	K1	weight gramm	min. lot
S75AC	15	122	60	21	83	60	30
S75AD	18	128	55	15	88	74	30
S75AE	22	124	50	7	81	134	30
S75AF	28	136	45	7	47	178	20
S75AG	35	234	62	30	110	378	15
S75AH	42	276	94	44	144	542	10
S75AJ	54	337	117	65	165	884	10
S75AK	76,1	230	226	65	65	1.580	5
S75AL	88,9	260	240	80	80	1.954	5
S75AM	108	291	222	95	95	2.516	5

BEND 30° WITH PLAIN ENDS

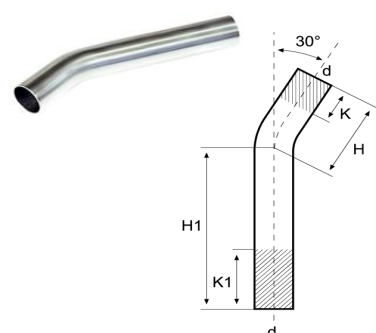


Part. No.	d	H1	H	K	K1	weight gramm	min. lot
S74AC	15	122	60	21	83	57	30
S74AD	18	128	55	16	89	74	30
S74AE	22	124	50	6	80	134	30
S74AF	28	130	54	7	47	258	20
S74AG	35	218	80	30	110	376	15
S74AH	42	274	98	44	144	558	10
S74AJ	54	324	137	65	165	912	10
S74AK	76,1	200	202	66	66	1.350	5
S74AL	88,9	262	264	80	80	2.110	5
S74AM	108	259	272	95	95	2.622	5

BEND 45° WITH PLAIN ENDS

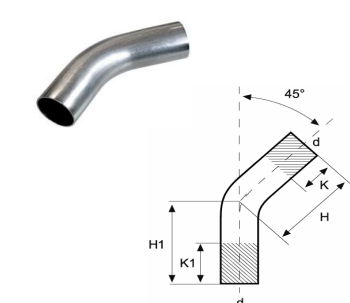


Part. No.	d	H1	H	K	K1	weight gramm	min. lot
S73AC	15	120	62	19	77	62	30
S73AD	18	124	58	16	82	73	30
S73AE	22	120	56	7	71	132	30
S73AF	28	122	58	2	66	160	20
S73AG	35	206	94	20	132	375	15
S73AH	42	262	114	1	149	562	10
S73AJ	54	321	146	37	212	906	10
S73AK	76,1	225	225	69	69	1.618	5
S73AL	88,9	267	267	103	103	2.078	5
S73AM	108	293	293	66	66	2.988	5

BEND 60° WITH PLAIN ENDS

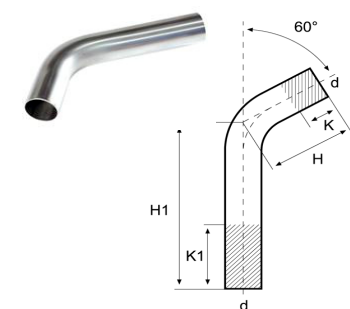


Part. No.	d	H1	H	K	K1	weight gramm	min. lot
S72AC	15	122	60	21	83	60	30
S72AD	18	122	62	16	76	70	30
S72AE	22	118	60	5	63	130	30
S72AF	28	116	71	7	47	178	20
S72AG	35	226	101	30	110	406	15
S72AH	42	251	124	44	145	562	10
S72AJ	54	308	162	65	165	884	10
S72AK	76,1	219	223	70	70	1.476	5
S72AL	88,9	250	257	80	80	1.970	5
S72AM	108	288	298	95	95	2.844	5

BEND 75° WITH PLAIN ENDS




Part. No.	d	H1	H	K	K1	weight gramm	min. lot
S71AC	15	117	66	22	73	58	30
S71AD	18	120	65	17	72	70	30
S71AE	22	118	64	9	63	130	30
S71AF	28	114	71	7	50	186	20
S71AG	35	200	110	26	119	378	15
S71AH	42	251	137	44	158	556	10
S71AJ	54	305	178	60	187	893	10
S71AK	76,1	240	240	62	62	1.556	5
S71AL	88,9	280	280	90	90	2.130	5
S71AM	108	330	330	45	45	3.360	5

BEND 90° WITH PLAIN ENDS

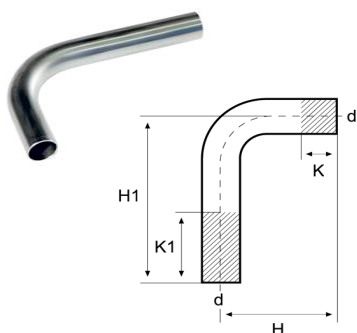


Part. No.	d	H1	H	K	K1	weight gramm	min. lot
S70AB	12	100	50	10	30	68	50
S70AC	15	120	70	22	72	54	40
S70AD	18	120	70	17	67	72	40
S70AE	22	120	70	9	59	128	20
S70AF	28	125	97	7	47	204	20
S70AG	35	200	120	30	110	362	10
S70AH	42	250	160	44	144	568	10
S70AJ	54	305	200	65	165	908	10
S70AK	76,1	250	250	62	62	1.668	5
S70AL	88,9	291	291	90	90	2.022	5
S70AM	108	364	364	45	45	3.200	5

PIPE BRIDGE

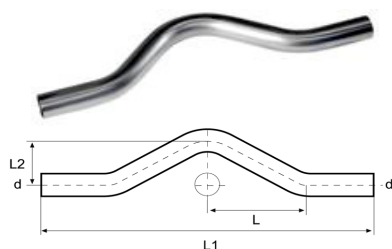


Part. No.	d	L1	L2	L	weight gramm	min. lot
S76AC	15	202	38	65	76	15
S76AD	18	236	43	68	104	15
S76AE	22	233	40	68	202	10
S76AF	28	303	64	93	350	10

PIPE BRIDGE SHORT

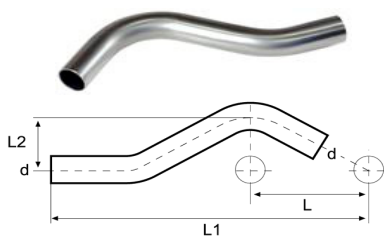

Part. No.	d	L1	L2	L	weight gramm	min. lot
S77AB	12	150	32	50	59	10
S77AC	15	145	37	57	56	10
S77AD	18	165	38	56	68	10
S77AE	22	181	40	60	150	10
S77AF	28	241	55	83	253	10


TRANSITION JOINT FOR GROOVED FITTINGS

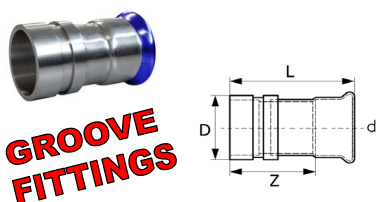

**GROOVE
FITTINGS**


Part. No.	d - D	L	Z	weight gramm	min. lot
S96EF-LBP	28x33,7	87	63	171	30
S96SG-LBP	35x42,4	95	68	239	20
S96TH-LBP	42x48,3	106	74	298	20
S96VJ-LBP	54x60,3	99	62	397	20
S96KK	76,1x76,1	130	95	986	10
S96LL	88,9x88,9	166	103	1230	10
S96ZM	108x114,4	184	107	1393	10

COUPLING




Part. No.	d	L	Z	weight gramm	min. lot
G10AC	15	52	10	40	100
G10AD	18	52	10	46	100
G10AE	22	59	13	62	100
G10AF	28	61	13	78	100
G10AG	35	72	18	107	60
G10AH	42	79	15	148	30
G10AJ	54	90	16	210	30
G10AK	76,1	142	32	594	5
G10AL	88,9	163	37	792	5
G10AM	108	192	38	1.144	5

SLIP COUPLING




Part. No.	d	L	E	weight gramm	min. lot
G11AC	15	71	24	52	100
G11AD	18	77	25	63	50
G11AE	22	82	27	84	50
G11AF	28	90	28	110	50
G11AG	35	99	31	151	50
G11AH	42	115	35	209	30
G11AJ	54	139	40	322	20

REDUCER WITH PLAIN END

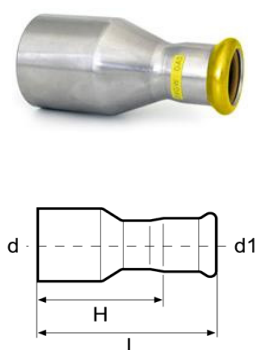

Part. No.	d-d1	L	H	weight gramm	min. lot
G12DC	18-15	55	34	39	100
G12EC	22-15	60	39	45	100
G12ED	22-18	57	36	46	100
G12FC	28-15	72	51	56	80
G12FD	28-18	77	56	61	80
G12FE	28-22	67	44	64	100
G12GE	35-22	83	60	88	80
G12GF	35-28	73	49	88	80
G12HF	42-28	98	74	126	30
G12HG	42-35	79	52	114	30
G12JF	54-28	99	75	185	20
G12JG	54-35	128	101	206	20
G12JH	54-42	97	65	179	20
G12KH	76,1-42	151	119	456	5
G12KJ	76,1-54	140	103	458	5
G12LJ	88,9-54	156	119	600	5
G12LK	88,9-76,1	156	101	682	5
G12MJ	108-54	204	167	876	5
G12MK	108-76,1	196	141	954	5
G12ML	108-88,9	190	127	992	5

BEND 90°




R = 1,5 d

R = 1,2 d

Part. No.	d	L	Z	weight gramm	min. lot
G20AC	15	48	27	56	100
G20AD	18	53	32	70	100
G20AE	22	60	37	100	100
G20AF	28	71	47	144	60
G20AG	35	87	60	206	60
G20AH	42	115	83	330	30
G20AJ	54	142	105	503	20
G20ZG	35	75	48	172	60
G20ZH	42	89	57	250	30
G20ZJ	54	107	70	398	20
G20ZK	76,1	150	95	966	5
G20ZL	88,9	174	111	1.312	5
G20ZM	108	215	138	1.948	5

BEND 90° WITH PLAIN END




R = 1,5 d

R = 1,2 d

Part. No.	d	L	H	Z	weight gramm	min. lot
G21AC	15	48	56	27	60	100
G21AD	18	53	62	32	72	100
G21AE	22	60	68	37	100	100
G21AF	28	71	80	47	144	50
G21AG	35	87	93	60	206	50
G21AH	42	115	125	83	310	20
G21AJ	54	142	149	105	394	20
G21ZG	35	75	83	48	166	50
G21ZH	42	89	97	57	258	20
G21ZJ	54	107	116	70	376	20
G21ZK	76,1	150	165	95	996	5
G21ZL	88,9	174	190	111	1.316	5
G21ZM	108	215	238	138	1.932	5

BEND 45°




R = 1,5 d

R = 1,2 d


Part. No.	d	L	Z	weight gramm	min. lot
G22AC	15	37	16	51	100
G22AD	18	38	17	58	100
G22AE	22	44	21	80	100
G22AF	28	51	27	118	50
G22AG	35	59	32	165	50
G22AH	42	77	45	258	20
G22AJ	54	88	51	374	20
G22ZG	35	49	22	162	50
G22ZH	42	63	31	216	20
G22ZJ	54	75	38	304	20
G22ZK	76,1	98	43	773	5
G22ZL	88,9	112	49	1.008	5
G22ZM	108	138	61	1.524	5

BEND 45° WITH PLAIN END


 $R = 1,5 d$

 $R = 1,2 d$


Part. No.	d	L	Z	weight gramm	min. lot	
G23AC	15	37	48	16	60	100
G23AD	18	38	45	17	60	100
G23AE	22	44	53	21	80	100
G23AF	28	51	60	27	115	50
G23AG	35	59	66	32	166	50
G23AH	42	77	80	45	258	20
G23AJ	54	88	97	51	370	20
G23ZG	35	49	51	22	128	50
G23ZH	42	63	72	31	310	20
G23ZJ	54	75	83	38	308	20
G23ZK	76,1	98	117	43	758	5
G23ZL	88,9	112	131	49	996	5
G23ZM	108	138	154	61	1.468	5

ADAPTOR WITH FEMALE THREAD




Part. No.	d - Rp	L	Z	weight gramm	min. lot
G80PC	15-Rp $\frac{1}{2}$	53	20	53	100
G80PD	18-Rp $\frac{1}{2}$	51	18	53	100
G80PE	22-Rp $\frac{1}{2}$	52	17	78	100
G80QE	22-Rp $\frac{3}{4}$	56	20	78	100
G80RE	22-Rp1	70	31	108	80
G80RF	28-Rp1	62	22	105	80
G80RG	35-Rp1	81	38	134	50
G80SG	35-Rp1 $\frac{1}{4}$	72	28	174	50
G80TH	42-Rp1 $\frac{1}{2}$	74	25	274	30
G80VJ	54-Rp2	106	52	352	20

ADAPTOR WITH MALE THREAD




Part. No.	d - R	L	Z	weight gramm	min. lot
G81PC	15-R $\frac{1}{2}$	52	31	53	100
G81PD	18-R $\frac{1}{2}$	52	31	57	100
G81PE	22-R $\frac{1}{2}$	68	45	73	100
G81QE	22-R $\frac{3}{4}$	58	35	75	100
G81RE	22-R1	72	49	120	100
G81QF	28-R $\frac{3}{4}$	73	49	102	100
G81RF	28-R1	62	38	118	100
G81RG	35-R1	82	55	150	50
G81SG	35-R1 $\frac{1}{4}$	70	43	170	50
G81TG	35-R1 $\frac{1}{2}$	84	57	204	30
G81TH	42-R1 $\frac{1}{2}$	75	43	204	20
G81VJ	54-R2	87	50	372	20
G81XK	76,1-R 2 $\frac{1}{2}$	125	70	804	5
G81YL	88,9-R 3	138	75	1.172	5

ELBOW ADAPTOR 90° WITH FEMALE THREAD




Part No.	d - Rp	L	L1	Z	Z1	weight gramm	min. lot
G30PC	15-Rp $\frac{1}{2}$	53	36	32	24	119	80
G30PD	18-Rp $\frac{1}{2}$	52	39	31	27	122	60
G30QE	22-Rp $\frac{3}{4}$	57	46	34	33	184	50
G30RF	28-Rp1	71	54	47	38	340	50
G30SG	35-Rp1 $\frac{1}{4}$	72	62	45	45	492	30

ELBOW ADAPTOR 90° WITH MALE THREAD

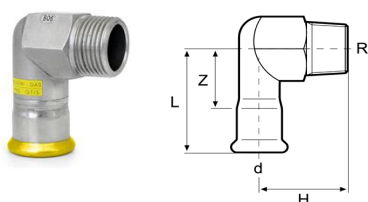


Part. No.	d - R	L	H	Z	weight gramm	min. lot
G31PC	15-R $\frac{1}{2}$	53	36	32	90	80
G31PD	18-R $\frac{1}{2}$	51	36	30	103	50
G31QE	22-R $\frac{3}{4}$	58	40	35	145	50
G31RF	28-R1	63	44	39	248	50
G31SG	35-R1 $\frac{1}{4}$	71	48	44	354	30

90° FEMALE ELBOW WITH WALL PLATE

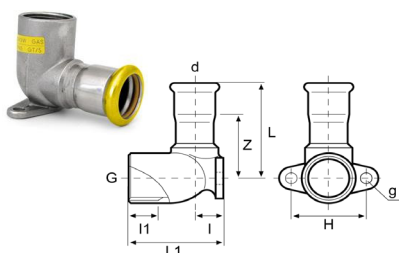


Part. No.	d - G (ISO 228)	L	L1	Z	I	I1	H	g	weight gramm	min. lot
G32PC	15-G $\frac{1}{2}$	46	43	25	12	12	34	5	104	80
G32PD	18-G $\frac{1}{2}$	47	44	26	13	12	34	6	100	60
G32QE	22-G $\frac{3}{4}$	52	51	29	16	13	40	6	147	60

CAP



Part. No.	d	L	Z	weight gramm	min. lot
G50AC	15	37	16	28	100
G50AD	18	40	19	34	50
G50AE	22	41	18	45	50
G50AF	28	46	22	62	50
G50AG	35	51	24	78	50
G50AH	42	59	27	116	20
G50AJ	54	72	35	176	20


FLANGE WITH PRESSING SOCKET PN 16

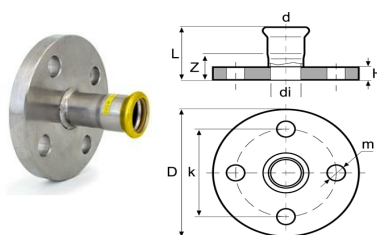

Part. No.	d	D	di	L	H	m	k	Z	weight gramm	min. lot
G52AE	22	105	21	59	12	14	75	39	792	20
G52AF	28	115	27	65	14	14	85	47	1.122	20
G52AG	35	140	32	70	15	18	100	52	1.770	20
G52AH	42	150	39	77	16	18	110	59	2.090	15
G52AJ	54	165	51	86	18	18	125	75	2.838	15
G52AK	76,1	185	72	126	18	18	145	71	3.637	5
G52AL	88,9	200	85	147	20	18	160	84	4.405	5
G52AM	108	220	104	167	20	18	180	90	5.360	5


I diametri 88,9 e 108 (PN 10/16) hanno 8 fori

T-PIECE EQUAL

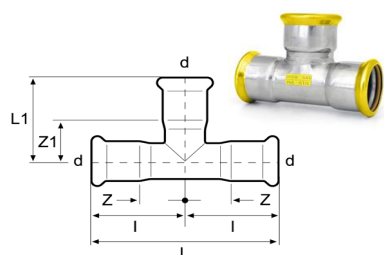


Part. No.	d	L	L1	Z	Z1	I	weight gramm	min. lot
G40AC	15	74	35	16	14	37	71	100
G40AD	18	80	35	19	14	40	84	100
G40AE	22	82	40	18	17	41	110	100
G40AF	28	92	45	22	21	46	146	80
G40AG	35	102	55	24	28	51	193	50
G40AH	42	118	61	27	29	59	278	20
G40AJ	54	142	72	34	35	71	406	20
G40AK	76,1	232	115	61	60	116	1.170	5
G40AL	88,9	262	127	68	64	131	1.556	5
G40AM	108	312	155	79	78	156	2.276	5

T-PIECE REDUCED

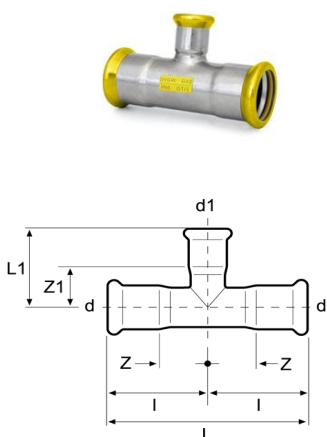


Part. No.	d - d1 - d	L	L1	Z	Z1	I	weight gramm	min. lot
G41CD	18-15-18	80	36	19	15	40	84	100
G41CE	22-15-22	82	39	18	18	41	100	100
G41DE	22-18-22	82	38	18	17	41	104	100
G41CF	28-15-28	92	42	22	21	46	132	80
G41DF	28-18-28	92	42	22	21	46	134	80
G41EF	28-22-28	92	45	22	22	46	140	80
G41CG	35-15-35	102	45	24	24	51	160	50
G41DG	35-18-35	102	45	24	24	51	164	50
G41EG	35-22-35	102	46	24	23	51	173	50
G41FG	35-28-35	102	48	24	24	51	176	50
G41EH	42-22-42	118	51	27	28	59	232	30
G41FH	42-28-42	118	53	27	29	59	241	30
G41GH	42-35-42	118	60	27	33	59	250	30
G41EJ	54-22-54	142	57	34	34	71	334	20
G41FJ	54-28-54	142	60	34	36	71	348	15
G41GJ	54-35-54	142	66	34	39	71	356	15
G41HJ	54-42-54	142	64	34	32	71	378	15
G41EK	76,1-22-76,1	232	68	61	45	116	936	5
G41FK	76,1-28-76,1	232	71	61	47	116	948	5
G41GK	76,1-35-76,1	232	75	61	48	116	962	5
G41HK	76,1-42-76,1	232	79	61	47	116	987	5
G41JK	76,1-54-76,1	232	80	61	43	116	996	5
G41EL	88,9-22-88,9	262	76	68	53	131	1.238	5
G41FL	88,9-28-88,9	262	76	68	52	131	1.182	5
G41GL	88,9-35-88,9	262	83	68	56	131	1.250	5
G41HL	88,9-42-88,9	262	85	68	53	131	1.266	5
G41JL	88,9-54-88,9	262	93	68	56	131	1.290	5
G41EM	108-22-108	312	85	79	62	156	1.792	5
G41FM	108-28-108	312	88	79	64	156	1.798	5
G41GM	108-35-108	312	94	79	67	156	1.822	5
G41HM	108-42-108	312	96	79	64	156	1.820	5
G41JM	108-54-108	312	102	79	65	156	1.852	5

T-PIECE WITH FEMALE THREAD

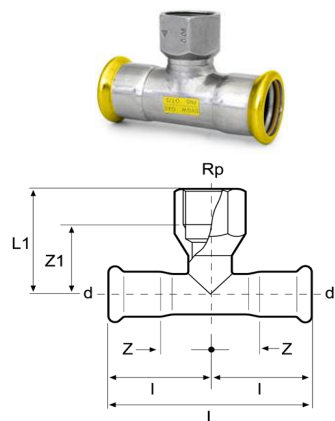


Part. No.	d - Rp	L	L1	Z	Z1	I	weight gramm	min. lot
G42PC	15-Rp $\frac{1}{2}$ -15	74	37	16	25	37	84	100
G42PD	18-Rp $\frac{1}{2}$ -18	80	39	19	27	40	99	80
G42QD	18-Rp $\frac{3}{4}$ -18	80	43	19	30	40	118	50
G42PE	22-Rp $\frac{1}{2}$ -22	82	41	18	29	41	118	100
G42QE	22-Rp $\frac{3}{4}$ -22	82	41	18	28	41	130	80
G42PF	28-Rp $\frac{1}{2}$ -28	92	44	22	32	46	146	80
G42QF	28-Rp $\frac{3}{4}$ -28	92	45	22	32	46	160	50
G42PG	35-Rp $\frac{1}{2}$ -35	102	48	24	36	51	176	50
G42QG	35-Rp $\frac{3}{4}$ -35	102	48	24	35	51	194	50
G42PH	42-Rp $\frac{1}{2}$ -42	118	46	27	34	59	249	20
G42PJ	54-Rp $\frac{1}{2}$ -54	142	55	34	43	71	350	15
G42QJ	54-Rp $\frac{3}{4}$ -54	142	58	34	45	71	360	15
G42VJ	54-Rp2-54	142	69	34	47	71	548	15
G42QK	76,1-Rp $\frac{3}{4}$ -76,1	232	68	61	55	116	1.258	5
G42VK	76,1-Rp2-76,1	232	81	61	59	116	1.144	5
G42QL	88,9-Rp $\frac{3}{4}$ -88,9	262	87	68	74	131	1.254	5
G42VL	88,9-Rp2-88,9	262	88	68	66	131	1.438	5
G42QM	108-Rp $\frac{3}{4}$ -108	312	86	79	73	156	1.812	5
G42VM	108-Rp2-108	312	98	79	76	156	1.992	5

ADAPTOR WITH UNION NUT IN BRASS/STAINLESS STEEL AND HNBR FLAT SEAL




Part. No.	G - d (ISO 228)	nut	L	Z	weight gramm	min. lot
G60QC	G $\frac{3}{4}$ -15	BRASS	50	22	90	50
G60SC	G1 $\frac{1}{4}$ -15	BRASS	52	20	190	15
G60QD	G $\frac{3}{4}$ -18	BRASS	36	8	74	50
G60RE	G1-22	BRASS	39	7	94	50
G60SF	G1 $\frac{1}{4}$ -28	BRASS	44	10	168	50
G60TG	G1 $\frac{1}{2}$ -35	BRASS	48	11	260	20
G60UH	G1 $\frac{3}{4}$ -42	BRASS	53	9	292	20
G60WJ	G2 $\frac{3}{8}$ -54	BRASS	61	10	454	20
G61QC	G $\frac{3}{4}$ -15	ST. STEEL	51	22	90	50
G61SC	G1 $\frac{1}{4}$ -15	ST. STEEL	52	20	90	15
G61QD	G $\frac{3}{4}$ -18	ST. STEEL	38	8	70	50
G61RE	G1-22	ST. STEEL	39	7	94	50
G61SF	G1 $\frac{1}{4}$ -28	ST. STEEL	44	10	152	50
G61TG	G1 $\frac{1}{2}$ -35	ST. STEEL	48	11	250	20
G61UH	G1 $\frac{3}{4}$ -42	ST. STEEL	53	9	258	20
G61WJ	G2 $\frac{3}{8}$ -54	ST. STEEL	61	10	404	20

ADAPTOR WITH UNION NUT IN BRASS AND CONICAL SEALING HNBR




Part. No.	G - d (ISO 228)	nut	L	Z	weight gramm	min. lot
G60WC	G $\frac{7}{8}$ -15	BRASS	49	24	123	50
G60XE	G1 $\frac{1}{8}$ -22	BRASS	53	24	207	50
G60YF	G1 $\frac{3}{8}$ -28	BRASS	57	30	324	50
G61WC	G $\frac{7}{8}$ -15	ST. STEEL	49	24	120	50
G61XE	G1 $\frac{1}{8}$ -22	ST. STEEL	53	24	202	50
G61YF	G1 $\frac{3}{8}$ -28	ST. STEEL	57	30	314	50

ADAPTOR UNION WITH FEMALE THREAD, BRASS/STAINLESS STEEL NUT AND HNBR FLAT SEAL




Part. No.	d - Rp	nut	L	Z	weight gramm	min. lot
G62PC	15-Rp $\frac{1}{2}$	BRASS	73	41	140	15
G62QC	15-Rp $\frac{3}{4}$	BRASS	76	43	180	15
G62PD	18-Rp $\frac{1}{2}$	BRASS	59	27	120	15
G62QD	18-Rp $\frac{3}{4}$	BRASS	62	29	160	15
G62QE	22-Rp $\frac{3}{4}$	BRASS	63	28	184	15
G62RE	22-Rp1	BRASS	67	30	214	15
G62RF	28-Rp1	BRASS	71	33	376	15
G62SG	35-Rp1 $\frac{1}{4}$	BRASS	77	34	470	15
G62TH	42-Rp1 $\frac{1}{2}$	BRASS	82	33	516	15
G62VJ	54-Rp2	BRASS	95	37	948	15
G63PC	15-Rp $\frac{1}{2}$	ST. STEEL	73	41	142	15
G63QC	15-Rp $\frac{3}{4}$	ST. STEEL	76	43	182	15
G63PD	18-Rp $\frac{1}{2}$	ST. STEEL	59	27	126	15
G63QD	18-Rp $\frac{3}{4}$	ST. STEEL	62	29	162	15
G63QE	22-Rp $\frac{3}{4}$	ST. STEEL	63	28	186	15
G63RE	22-Rp1	ST. STEEL	67	30	216	15
G63RF	28-Rp1	ST. STEEL	71	33	356	15
G63SG	35-Rp1 $\frac{1}{4}$	ST. STEEL	77	34	462	15
G63TH	42-Rp1 $\frac{1}{2}$	ST. STEEL	82	33	484	15
G63VJ	54-Rp2	ST. STEEL	95	37	898	15

**ADAPTOR UNION WITH MALE
THREAD, BRASS/STAINLESS STEEL
NUT AND HNBR FLAT SEAL**




Part. No.	d - R	nut	L	H	weight gramm	min. lot
G64PC	15-R $\frac{1}{2}$	BRASS	77	56	150	15
G64QC	15-R $\frac{3}{4}$	BRASS	80	59	168	15
G64PD	18-R $\frac{1}{2}$	BRASS	63	42	129	15
G64QD	18-R $\frac{3}{4}$	BRASS	66	45	149	15
G64PE	22-R $\frac{1}{2}$	BRASS	67	44	225	15
G64QE	22-R $\frac{3}{4}$	BRASS	69	46	195	15
G64RE	22-R1	BRASS	73	50	237	15
G64RF	28-R1	BRASS	78	54	366	15
G64SG	35-R1 $\frac{1}{4}$	BRASS	85	59	495	15
G64TH	42-R1 $\frac{1}{2}$	BRASS	90	58	578	15
G64VJ	54-R2	BRASS	104	67	988	15
G65PC	15-R $\frac{1}{2}$	ST. STEEL	77	56	148	15
G65QC	15-R $\frac{3}{4}$	ST. STEEL	80	59	168	15
G65PD	18-R $\frac{1}{2}$	ST. STEEL	63	42	128	15
G65QD	18-R $\frac{3}{4}$	ST. STEEL	66	45	148	15
G65PE	22-R $\frac{1}{2}$	ST. STEEL	67	44	218	15
G65QE	22-R $\frac{3}{4}$	ST. STEEL	69	46	194	15
G65RE	22-R1	ST. STEEL	73	50	232	15
G65RF	28-R1	ST. STEEL	78	54	350	15
G65SG	35-R1 $\frac{1}{4}$	ST. STEEL	85	59	482	15
G65TH	42-R1 $\frac{1}{2}$	ST. STEEL	90	58	588	15
G65VJ	54-R2	ST. STEEL	104	67	936	15

COUPLING




Part. No.	d	L	Z	weight gramm	bag quantity	min. lot
C10AB-LBP	12	42	6	24	20	200
C10AC-LBP	15	52	10	39	20	200
C10AD-LBP	18	52	10	44	20	200
C10AE-LBP	22	59	13	61	20	200
C10AF-LBP	28	61	13	77	20	200
C10AG-LBP	35	72	18	103	10	200
C10AH-LBP	42	87	15	146	8	120
C10AJ-LBP	54	95	16	210	6	108
C10AK	76,1	142	32	596	*	20
C10AL	88,9	163	37	814	*	10
C10AM	108	192	38	1.178	*	10

SLIP COUPLING




Part. No.	d	L	E	weight gramm	bag quantity	min. lot
C11AB-LBP	12	56	22	32	20	200
C11AC-LBP	15	75	24	51	20	200
C11AD-LBP	18	77	25	60	20	100
C11AE-LBP	22	86	27	81	20	100
C11AF-LBP	28	92	28	110	20	100
C11AG-LBP	35	99	31	138	10	60
C11AH-LBP	42	125	35	200	6	60
C11AJ-LBP	54	142	40	280	4	40
C11AK	76,1	230	60	875	*	5
C11AL	88,9	262	70	1.200	*	5
C11AM	108	304	80	1.705	*	5

REDUCER WITH PLAIN END




Part. No.	d - d1	L	H	weight gramm	bag quantity	min. lot
C12CB-LBP	15-12	51	33	29	20	200
C12DB-LBP	18-12	53	35	30	20	200
C12DC-LBP	18-15	55	34	38	20	200
C12EB-LBP	22-12	66	42	41	20	200
C12EC-LBP	22-15	60	39	43	20	200
C12ED-LBP	22-18	57	36	44	20	200
C12FB-LBP	28-12	75	57	60	20	100
C12FC-LBP	28-15	81	60	65	20	100
C12FD-LBP	28-18	84	63	70	20	100
C12FE-LBP	28-22	70	47	61	20	200
C12GC-LBP	35-15	84	63	86	10	60
C12GD-LBP	35-18	87	66	92	10	60
C12GE-LBP	35-22	76	53	92	10	100
C12GF-LBP	35-28	74	48	84	10	100
C12HD-LBP	42-18	98	77	124	6	30
C12HE-LBP	42-22	87	64	118	6	60
C12HF-LBP	42-28	100	76	131	6	60
C12HG-LBP	42-35	78	52	112	6	60
C12JD-LBP	54-18	108	87	192	4	32
C12JE-LBP	54-22	110	88	190	4	40
C12JF-LBP	54-28	100	76	186	4	40
C12JG-LBP	54-35	129	102	204	4	40
C12JH-LBP	54-42	108	76	210	4	40
C12KH-LBP	76,1-42	151	119	451	*	10
C12KJ-LBP	76,1-54	145	108	454	*	10
C12LJ-LBP	88,9-54	157	120	596	*	10
C12LK	88,9-76,1	157	105	699	*	10
C12MJ-LBP	108-54	204	167	898	*	10
C12MK	108-76,1	196	144	980	*	10
C12ML	108-88,9	192	133	996	*	10

BEND 90° R 1,2




	d	L	Z	weight gramm	bag quantity	min. lot
C20ZB-LBP	12	42	24	38	20	200
C20ZC-LBP	15	41	20	48	20	200
C20ZD-LBP	18	45	24	61	20	200
C20ZE-LBP	22	49	26	84	20	200
C20ZF-LBP	28	59	35	120	10	200
C20ZG-LBP	35	72	45	165	10	160
C20ZH-LBP	42	91	59	256	6	60
C20ZJ-LBP	54	110	73	386	6	60
C20ZK	76,1	150	95	994	*	20
C20ZL	88,9	174	111	1.364	*	20
C20ZM	108	215	138	2.060	*	20

BEND 90° WITH PLAIN END R 1,2




Part. No.	d	L	H	Z	weight gramm	bag quantity	min. lot
C21ZB-LBP	12	42	48	24	38	20	200
C21ZC-LBP	15	41	49	20	48	20	200
C21ZD-LBP	18	45	53	24	60	20	200
C21ZE-LBP	22	49	59	26	89	20	200
C21ZF-LBP	28	59	69	35	120	10	200
C21ZG-LBP	35	72	83	45	164	10	100
C21ZH-LBP	42	91	96	59	255	6	60
C21ZJ-LBP	54	110	116	73	382	6	60
C21ZK	76,1	150	166	95	1.006	*	10
C21ZL	88,9	174	190	111	1.378	*	10
C21ZM	108	215	230	138	2.028	*	10

BEND 45° R 1,2





Part. No.	d	L	Z	weight gramm	bag quantity	min. lot
C22ZB-LBP	12	32	14	34	20	100
C22ZC-LBP	15	30	9	41	20	200
C22ZD-LBP	18	31	10	51	20	200
C22ZE-LBP	22	35	12	68	20	200
C22ZF-LBP	28	41	17	93	10	160
C22ZG-LBP	35	56	29	126	10	100
C22ZH-LBP	42	63	31	198	5	60
C22ZJ-LBP	54	75	38	308	4	40
C22ZK	76,1	98	43	800	*	10
C22ZL	88,9	113	50	1.084	*	10
C22ZM	108	138	61	1.598	*	10

BEND 45° WITH PLAIN END R 1,2




Part. No.	d	L	H	Z	weight gramm	bag quantity	min. lot
C23ZB-LBP	12	32	41	14	33	20	100
C23ZC-LBP	15	30	42	9	41	20	200
C23ZD-LBP	18	31	35	10	50	20	200
C23ZE-LBP	22	35	47	12	69	20	200
C23ZF-LBP	28	41	47	17	99	10	160
C23ZG-LBP	35	36	66	29	128	10	100
C23ZH-LBP	42	63	70	31	198	5	60
C23ZJ-LBP	54	75	82	38	316	4	40
C23ZK	76,1	98	119	43	793	*	10
C23ZL	88,9	113	130	50	1.076	*	10
C23ZM	108	138	160	61	1.564	*	10

**ADAPTOR
WITH FEMALE THREAD**




Part. No.	d - Rp	L	Z	weight gramm	bag quantity	min. lot
C80NB-LBP	12-Rp $\frac{3}{8}$	31	3	53	20	120
C80PB-LBP	12-Rp $\frac{1}{2}$	35	5	58	20	120
C80NC-LBP	15-Rp $\frac{3}{8}$	35	4	54	20	100
C80PC-LBP	15-Rp $\frac{1}{2}$	37	4	82	20	200
C80QC-LBP	15-Rp $\frac{3}{4}$	38	4	91	20	100
C80PD-LBP	18-Rp $\frac{1}{2}$	37	4	59	20	160
C80QD-LBP	18-Rp $\frac{3}{4}$	38	4	72	20	160
C80PE-LBP	22-Rp $\frac{1}{2}$	37	3	88	20	160
C80QE-LBP	22-Rp $\frac{3}{4}$	40	4	88	20	200
C80RE-LBP	22-Rp1	43	4	105	20	120
C80PF-LBP	28-Rp $\frac{1}{2}$	45	9	174	10	120
C80QF-LBP	28-Rp $\frac{3}{4}$	43	6	158	10	120
C80RF-LBP	28-Rp1	45	5	97	10	200
C80RG-LBP	35-Rp1	45	8	223	10	80
C80SG-LBP	35-Rp1 $\frac{1}{4}$	73	25	198	10	120
C80TH-LBP	42-Rp1 $\frac{1}{2}$	75	20	248	5	100
C80VJ-LBP	54-Rp2	85	18	476	5	80

**ADAPTOR
WITH MALE THREAD**




Part. No.	d - R	L	H	weight gramm	bag quantity	min. lot
C81NB-LBP	12-R $\frac{3}{8}$	36	18	42	20	120
C81PB-LBP	12-R $\frac{1}{2}$	40	22	45	20	120
C81NC-LBP	15-R $\frac{3}{8}$	43	22	40	20	200
C81PC-LBP	15-R $\frac{1}{2}$	43	22	50	20	200
C81QC-LBP	15-R $\frac{3}{4}$	44	23	86	20	100
C81PD-LBP	18-R $\frac{1}{2}$	44	23	61	20	200
C81QD-LBP	18-R $\frac{3}{4}$	45	24	79	20	160
C81PE-LBP	22-R $\frac{1}{2}$	44	21	74	20	160
C81QE-LBP	22-R $\frac{3}{4}$	45	22	79	20	200
C81RE-LBP	22-R1	47	24	120	20	200
C81QF-LBP	28-R $\frac{3}{4}$	47	23	96	10	200
C81RF-LBP	28-R1	49	25	100	10	200
C81RG-LBP	35-R1	63	23	155	10	200
C81SG-LBP	35-R1 $\frac{1}{4}$	54	27	164	10	200
C81TG-LBP	35-R1 $\frac{1}{2}$	54	27	275	10	100
C81TH-LBP	42-R1 $\frac{1}{2}$	58	26	197	6	84
C81VJ-LBP	54-R2	69	32	358	4	80
C81XK	76,1-R2 $\frac{1}{2}$	123	68	999	*	10
C81YL	88,9-R3	134	71	1.153	*	10
C81ZM	108-R4	156	78	1.924	*	5

**ADAPTOR WITH FEMALE
THREAD AND PLAIN END**




Part. No.	d - Rp	L	H	weight gramm	bag quantity	min. lot
C86NB	12-Rp $\frac{3}{8}$	54	44	66	*	60
C86PB	12-Rp $\frac{1}{2}$	58	46	60	*	60
C86NC	15-Rp $\frac{3}{8}$	74	64	64	*	60
C86PC	15-Rp $\frac{1}{2}$	61	49	73	*	60
C86PD	18-Rp $\frac{1}{2}$	61	49	71	*	60
C86QD	18-Rp $\frac{3}{4}$	64	51	125	*	60
C86PE	22-Rp $\frac{1}{2}$	61	49	69	*	60
C86QE	22-Rp $\frac{3}{4}$	65	52	124	*	60

**ADAPTOR WITH MALE
THREAD AND PLAIN END**




Part. No.	d - R	H	weight gramm	bag quantity	min. lot
C87NB	12-R ^{3/8}	50	40	*	60
C87PB	12-R ^{1/2}	55	58	*	60
C87PC	15-R ^{1/2}	57	57	*	60
C87PD	18-R ^{1/2}	57	58	*	60
C87QD	18-R ^{3/4}	59	75	*	60
C87PE	22-R ^{1/2}	57	70	*	60
C87QE	22-R ^{3/4}	59	74	*	60

**BEND ADAPTOR 90°
WITH MALE THREAD**




Part. No.	d - R	L	H	Z	weight gramm	bag quantity	min. lot
C83NB-LBP	12-R ^{3/8}	42	34	24	53	20	40
C83NC-LBP	15-R ^{3/8}	41	39	20	62	20	40
C83PC-LBP	15-R ^{1/2}	41	40	20	70	20	60
C83PD-LBP	18-R ^{1/2}	45	48	24	70	20	60
C83QE-LBP	22-R ^{3/4}	49	54	26	106	10	60
C83RF-LBP	28-R1	59	68	35	174	10	40
C83SG-LBP	35-R1 ^{1/4}	72	102	45	292	10	30
C83TH-LBP	42-R1 ^{1/2}	91	116	59	376	5	30
C83VJ-LBP	54-R2	110	142	73	666	5	30

**BEND ADAPTOR 90°
WITH FEMALE THREAD**

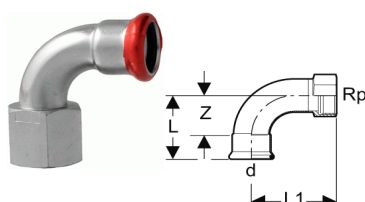


Part. No.	d - Rp	L	L1	Z	weight gramm	bag quantity	min. lot
C82NB-LBP	12-Rp ^{3/8}	42	41	24	80	20	40
C82NC-LBP	15-Rp ^{3/8}	41	44	20	83	20	40
C82PC-LBP	15-Rp ^{1/2}	41	44	20	83	20	40
C82PD-LBP	18-Rp ^{1/2}	45	51	24	88	20	40
C82QE-LBP	22-Rp ^{3/4}	49	56	26	150	10	40
C82PF-LBP	28-Rp ^{1/2}	59	64	35	200	10	40

**ELBOW ADAPTOR 90°
WITH FEMALE THREAD**

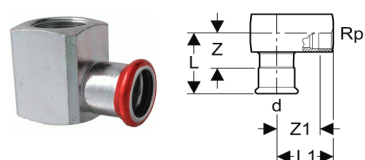


Part. No.	d - Rp	L	L1	Z	Z1	weight gramm	bag quantity	min. lot
C30PC-LBP	15-Rp ^{1/2}	36	27	15	15	171	20	100
C30PD-LBP	18-Rp ^{1/2}	36	27	15	15	172	10	80
C30PE-LBP	22-Rp ^{1/2}	42	40	19	28	236	10	50
C30QE-LBP	22-Rp ^{3/4}	42	30	19	17	292	10	50
C30PF-LBP	28-Rp ^{1/2}	47	43	23	31	454	10	40

**ELBOW ADAPTOR 90°
WITH MALE THREAD**

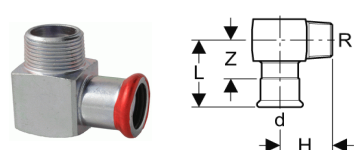


Part. No.	d - R	L	H	Z	weight gramm	bag quantity	min. lot
C31NB-LBP	12-R ^{3/8}	34	21	16	84	20	120
C31NC-LBP	15-R ^{3/8}	34	23	13	86	20	120
C31PC-LBP	15-R ^{1/2}	34	28	13	93	20	120
C31PD-LBP	18-R ^{1/2}	36	26	15	136	20	80
C31QD-LBP	18-R ^{3/4}	37	31	16	150	10	60
C31QE-LBP	22-R ^{3/4}	39	36	16	190	10	60

T-PIECE EQUAL




Part. No.	d	L	L1	Z	Z1	I	weight gramm	bag quantity	min. lot
C40AB-LBP	12	56	35	10	17	28	46	20	200
C40AC-LBP	15	74	36	16	15	37	69	20	200
C40AD-LBP	18	80	37	19	16	40	82	20	200
C40AE-LBP	22	82	43	18	20	41	109	20	200
C40AF-LBP	28	92	46	22	22	46	146	10	200
C40AG-LBP	35	102	55	24	28	51	187	8	160
C40AH-LBP	42	118	60	27	28	59	271	5	60
C40AJ-LBP	54	142	73	34	36	71	397	4	60
C40AK	76,1	232	121	61	66	116	1.220	*	10
C40AL	88,9	262	126	68	63	131	1.640	*	10
C40AM	108	312	152	79	75	156	2.392	*	10

T-PIECE REDUCED

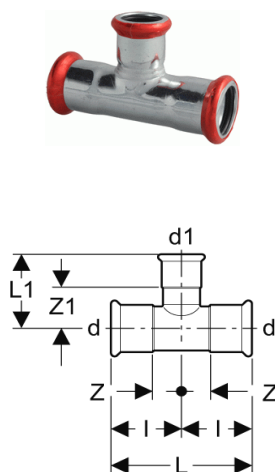


Part. No.	d - d1 - d	L	L1	Z	Z1	I	weight gramm	bag quantity	min. lot
C41BC-LBP	15-12-15	74	33	16	15	37	65	20	100
C41BD-LBP	18-12-18	80	34	19	16	40	75	20	100
C41CD-LBP	18-15-18	80	35	19	14	40	77	20	200
C41BE-LBP	22-12-22	82	36	18	18	41	95	20	100
C41CE-LBP	22-15-22	82	40	18	19	41	99	20	200
C41DE-LBP	22-18-22	82	40	18	19	41	102	20	160
C41CF-LBP	28-15-28	92	42	22	21	46	127	10	180
C41DF-LBP	28-18-28	92	43	22	22	46	130	10	160
C41EF-LBP	28-22-28	92	46	22	23	46	136	10	180
C41CG-LBP	35-15-35	102	45	24	24	51	157	10	100
C41DG-LBP	35-18-35	102	45	24	24	51	161	10	100
C41EG-LBP	35-22-35	102	48	24	25	51	170	10	100
C41FG-LBP	35-28-35	102	50	24	25	51	179	10	100
C41CH-LBP	42-15-42	118	52	27	31	59	218	10	60
C41DH-LBP	42-18-42	118	52	27	31	59	222	10	40
C41EH-LBP	42-22-42	118	54	27	31	59	228	5	60
C41FH-LBP	42-28-42	118	53	27	29	59	234	4	60
C41GH-LBP	42-35-42	118	57	27	30	59	250	5	60
C41CJ-LBP	54-15-54	142	54	34	33	71	321	6	30
C41DJ-LBP	54-18-54	142	54	34	33	71	331	6	30
C41EJ-LBP	54-22-54	142	56	34	33	71	338	4	40
C41FJ-LBP	54-28-54	142	59	34	35	71	352	4	40
C41GJ-LBP	54-35-54	142	64	34	37	71	356	6	36
C41HJ-LBP	54-42-54	142	68	34	36	71	375	4	40
C41EK-LBP	76,1-22-76,1	232	68	61	45	116	986	*	10
C41FK-LBP	76,1-28-76,1	232	71	61	47	116	981	*	10
C41GK-LBP	76,1-35-76,1	232	75	61	48	116	998	*	10
C41HK-LBP	76,1-42-76,1	232	79	61	47	116	1.015	*	10
C41JK-LBP	76,1-54-76,1	232	80	61	43	116	1.034	*	10
C41EL-LBP	88,9-22-88,9	262	76	68	53	131	1.306	*	10
C41FL-LBP	88,9-28-88,9	262	76	68	52	131	1.240	*	10
C41GL-LBP	88,9-35-88,9	262	83	68	57	131	1.295	*	10
C41HL-LBP	88,9-42-88,9	262	85	68	53	131	1.336	*	10
C41JL-LBP	88,9-54-88,9	262	93	68	56	131	1.372	*	10
C41KL	88,9-76,1-88,9	262	128	68	73	131	1.572	*	10
C41EM-LBP	108-22-108	312	85	79	62	156	1.831	*	10
C41FM-LBP	108-28-108	312	88	79	64	156	1.820	*	5
C41GM-LBP	108-35-108	312	94	79	66	156	1.835	*	5
C41HM-LBP	108-42-108	312	96	79	64	156	1.849	*	5
C41JM-LBP	108-54-108	312	102	79	65	156	1.872	*	5
C41KM	108-76,1-108	312	125	79	70	156	2.119	*	5
C41LM	108-88,9-108	312	135	79	72	156	2.100	*	5

T-PIECE WITH FEMALE THREAD

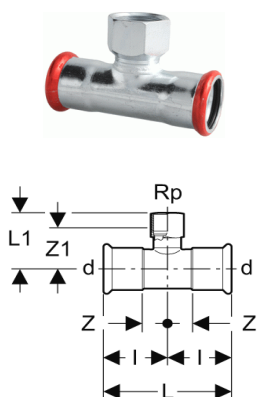


Part. No.	d - Rp	L	L1	Z	Z1	I	weight gramm	bag quantity	min. lot
C42NB-LBP	12-Rp $\frac{3}{8}$ -12	56	33	10	23	28	67	20	100
C42PB-LBP	12-Rp $\frac{1}{2}$ -12	56	36	10	23	28	68	20	100
C42PC-LBP	15-Rp $\frac{1}{2}$ -15	74	38	16	23	37	84	20	160
C42PD-LBP	18-Rp $\frac{1}{2}$ -18	80	39	20	24	40	95	20	120
C42PE-LBP	22-Rp $\frac{1}{2}$ -22	82	42	18	30	41	127	20	200
C42QE-LBP	22-Rp $\frac{3}{4}$ -22	82	43	18	30	41	128	20	100
C42PF-LBP	28-Rp $\frac{1}{2}$ -28	92	44	22	32	46	150	10	200
C42QF-LBP	28-Rp $\frac{3}{4}$ -28	92	45	22	32	46	157	10	100
C42PG-LBP	35-Rp $\frac{1}{2}$ -35	102	48	24	36	51	185	10	100
C42QG-LBP	35-Rp $\frac{3}{4}$ -35	102	48	24	35	51	183	10	40
C42PH-LBP	42-Rp $\frac{1}{2}$ -42	118	46	27	34	59	248	5	60
C42QH-LBP	42-Rp $\frac{3}{4}$ -42	118	51	27	38	59	250	5	40
C42PJ-LBP	54-Rp $\frac{1}{2}$ -54	142	58	34	46	74	355	6	42
C42QJ-LBP	54-Rp $\frac{3}{4}$ -54	142	59	34	46	74	354	6	36
C42QK	76,1-Rp $\frac{3}{4}$ -76,1	232	69	61	56	116	987	*	10
C42QL	88,9-Rp $\frac{3}{4}$ -88,9	262	76	68	63	131	1.314	*	10
C42QM	108-Rp $\frac{3}{4}$ -108	312	86	79	73	156	1.900	*	10

T-PIECE ENLARGED

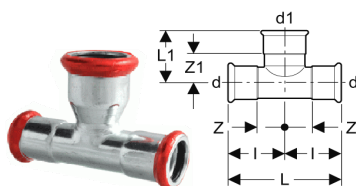


Part. No.	d - d1 - d	L	L1	Z	Z1	I	weight gramm	bag quantity	min. lot
C44CB-LBP	12-15-12	56	38	10	17	28	52	20	100
C44DC-LBP	15-18-15	74	36	16	15	37	72	20	100
C44EC-LBP	15-22-15	74	42	16	19	37	86	20	100
C44ED-LBP	18-22-18	80	45	19	22	40	94	20	80
C44FE-LBP	22-28-22	82	45	18	21	41	122	10	80

PIPE CROSS 90°





Part. No.	d - d1	L	L1	Z	Z1	I	I1	weight gramm	bag quantity	min. lot
C45AC-LBP	15-15	74	74	16	16	37	37	102	10	40
C45CD-LBP	18-15	80	74	19	16	40	37	111	10	80
C45CE-LBP	22-15	82	74	18	16	41	37	132	10	80
C45DE-LBP	22-18	82	80	18	19	41	40	142	10	40
C45CF-LBP	28-15	92	74	22	16	46	37	160	10	40
C45DF-LBP	28-18	92	80	22	19	46	40	171	10	40
C45EF-LBP	28-22	92	82	22	18	46	41	188	10	20
C45EG-LBP	35-22	102	82	24	18	51	41	220	5	10
C45EH-LBP	42-22	118	82	27	18	59	41	282	5	10
C45EJ-LBP	54-22	142	82	34	18	71	41	390	5	10


CAP





Part. No.	d	L	Z	weight gramm	bag quantity	min. lot
C50AB-LBP	12	30	12	21	20	100
C50AC-LBP	15	38	17	28	20	100
C50AD-LBP	18	41	20	33	20	100
C50AE-LBP	22	42	19	45	10	100
C50AF-LBP	28	46	22	61	10	60
C50AG-LBP	35	51	24	82	10	60
C50AH-LBP	42	59	27	116	10	40
C50AJ-LBP	54	73	36	178	10	20
C50AK	76,1	95	40	376	*	5
C50AL	88,9	115	52	504	*	5
C50AM	108	130	53	760	*	5

PLUG		Part. No.	d	L	E	weight gramm	bag quantity	min. lot
	C51AB	12	36	30	14	*	60	
	C51AC	15	42	33	22	*	60	
	C51AD	18	40	33	28	*	60	
	C51AE	22	43	34	38	*	60	
	C51AF	28	47	36	50	*	60	
	C51AG	35	49	40	70	*	60	
	C51AH	42	55	44	96	*	40	
	C51AJ	54	65	49	144	*	20	
	C51AK	76,1	87	74	376	*	5	
	C51AL	88,9	92	78	474	*	5	
	C51AM	108	107	92	698	*	5	


ADAPTOR WITH UNION NUT IN BRASS AND EPDM FLAT SEAL		Part. No.	G - d (ISO 228)	L	Z	weight gramm	bag quantity	min. lot
	C60QC-LBP	G $\frac{3}{4}$ -15	35	12	74	*	100	
	C60QD-LBP	G $\frac{3}{4}$ -18	37	9	72	*	100	
	C60RE-LBP	G1-22	39	7	96	*	60	
	C60SF-LBP	G1 $\frac{1}{4}$ -28	44	10	168	*	50	
	C60TG-LBP	G1 $\frac{1}{2}$ -35	48	11	252	*	40	
	C60UH-LBP	G1 $\frac{3}{4}$ -42	53	9	286	*	20	
	C60WJ-LBP	G2 $\frac{1}{2}$ -54	61	10	428	*	12	

ADAPTOR UNION WITH FEMALE THREAD, BRASS NUT AND EPDM FLAT SEAL		Part. No.	d - Rp	L	Z	weight gramm	bag quantity	min. lot
	C62PC-LBP	15-Rp $\frac{1}{2}$	59	27	176	*	40	
	C62QC-LBP	15-Rp $\frac{3}{4}$	60	27	188	*	40	
	C62PD-LBP	18-Rp $\frac{1}{2}$	61	29	174	*	40	
	C62QD-LBP	18-Rp $\frac{3}{4}$	62	29	188	*	40	
	C62QE-LBP	22-Rp $\frac{3}{4}$	63	28	196	*	40	
	C62RE-LBP	22-Rp1	67	30	234	*	40	
	C62RF-LBP	28-Rp1	71	33	416	*	30	
	C62SG-LBP	35-Rp1 $\frac{1}{4}$	77	34	494	*	24	
	C62TH-LBP	42-Rp1 $\frac{1}{2}$	82	33	564	*	16	
	C62VJ-LBP	54-Rp2	95	37	1.006	*	16	

ADAPTOR UNION WITH MALE THREAD, BRASS NUT AND EPDM FLAT SEAL		Part. No.	d - R	L	H	weight gramm	bag quantity	min. lot
	C64PC-LBP	15-R $\frac{1}{2}$	61	41	138	*	40	
	C64QC-LBP	15-R $\frac{3}{4}$	65	44	124	*	40	
	C64PD-LBP	18-R $\frac{1}{2}$	64	43	136	*	40	
	C64QD-LBP	18-R $\frac{3}{4}$	67	46	122	*	40	
	C64PE-LBP	22-R $\frac{1}{2}$	67	44	228	*	40	
	C64QE-LBP	22-R $\frac{3}{4}$	69	46	212	*	40	
	C64RE-LBP	22-R1	73	50	208	*	40	
	C64RF-LBP	28-R1	76	52	402	*	30	
	C64SG-LBP	35-R1 $\frac{1}{4}$	85	59	486	*	24	
	C64TH-LBP	42-R1 $\frac{1}{2}$	90	58	608	*	16	
	C64VJ-LBP	54-R2	104	67	828	*	16	

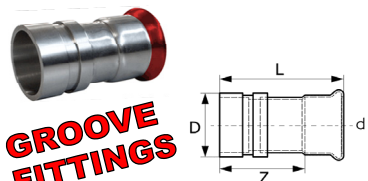TRANSITION JOINT FOR GROOVED FITTINGS		Part. No.	d - D	L	Z	weight gramm	bag quantity	min. lot
	C96EF-LBP	28x33,7	74	50	152	*	30	
	C96SG-LBP	35x42,4	79	52	212	*	20	
	C96TH-LBP	42x48,3	86	54	260	*	20	
	C96VJ-LBP	54x60,3	99	62	367	*	20	
	C96KK	76,1x76,1	108	53	802	*	10	
	C96LL	88,9x88,9	119	56	991	*	10	
	C96ZM	108x114,4	128	51	1055	*	10	

**FLANGE WITH PRESSING
SOCKET PN 6 AND PN 10/16**



PN 10/16


Part. No.	d	D	di	L	H	m	k	Z	weight gramm	bag quantity	min. lot
C52AE-LBP	22	105	21	63	16	14	75	40	676	*	20
C52AF-LBP	28	115	27	67	16	14	85	43	1.224	*	20
C52AG-LBP	35	140	32	72	18	18	100	45	2.048	*	20
C52AH-LBP	42	150	41,8	80	18	18	110	48	2.394	*	20
C52AJ-LBP	54	165	54	96	18	18	125	59	2.844	*	20
C52AK	76,1	185	72	134	18	18	145	79	3.584	*	10
C52AL	88,9	200	85	141	20	18	160	78	4.450	*	10
C52AM	108	220	104	166	20	18	180	89	5.271	*	10

Diameters 88,9 and 108 (PN 10/16) are with 8 holes

PN 6

C53AE-LBP	22	90	21	61	14	11	65	38	676	*	20
C53AF-LBP	28	100	27	65	14	11	75	41	828	*	10
C53AG-LBP	35	120	32	70	16	14	90	43	1.364	*	10
C53AH-LBP	42	130	39	77	16	14	100	45	1.608	*	10
C53AJ-LBP	54	140	54	96	16	14	110	59	1.790	*	10
C53AK	76,1	160	72	130	14	14	130	75	2.144	*	5
C53AL	88,9	190	85	137	16	18	150	74	3.306	*	5
C53AM	108	210	104	162	16	18	170	85	4.100	*	5


**ADAPTOR WITH PLAIN AND
WELDING END****



** Not galvanised


Part. No.	d-d1	L	I	weight gramm	bag quantity	min. lot
C13AC	15-17,2	120	30	127	*	80
C13AD	18-21,3	120	30	131	*	80
C13AE	22-26,9	120	34	217	*	50
C13AF	28-33,7	120	34	303	*	40
C13AG	35-42,4	120	40	420	*	30
C13AH	42-48,3	120	45	440	*	24
C13AJ	54-60,3	120	50	540	*	24
C13AK	76,1-76,1	120	70	570	*	10
C13AL	88,9-88,9	120	75	692	*	10
C13AM	108-114,3	120	90	842	*	10

PIPE BRIDGE




Part. No.	d	L1	L2	L	weight gramm	bag quantity	min. lot
C76AB	12	200	35	55	86	*	30
C76AC	15	202	37	64	110	*	30
C76AD	18	237	42	66	148	*	30
C76AE	22	233	42	58	197	*	20
C76AF	28	301	50	102	312	*	20

PIPE BRIDGE SHORT




Part. No.	d	L1	L2	L	weight gramm	bag quantity	min. lot
C77AB	12	154	35	55	61	*	30
C77AC	15	145	37	57	81	*	30
C77AD	18	157	40	60	107	*	30
C77AE	22	175	52	65	145	*	30
C77AF	28	226	65	74	240	*	30

BEND 15° WITH PLAIN ENDS

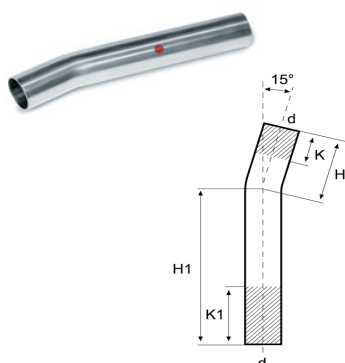


Part. No.	d	H1	H	K	K1	weight gramm	bag quantity	min. lot
C75AB	12	122	60	21	83	71	*	20
C75AC	15	122	60	21	83	92	*	20
C75AD	18	128	55	15	88	90	*	20
C75AE	22	124	50	7	81	131	*	20
C75AF	28	136	45	7	47	182	*	20
C75AG	35	234	62	30	110	364	*	15
C75AH	42	276	94	44	144	528	*	8
C75AJ	54	337	117	65	165	894	*	8
C75AK	76,1	230	226	65	65	1.650	*	3
C75AL	88,9	260	240	80	80	2.160	*	3
C75AM	108	291	222	95	95	2.688	*	3

BEND 30° WITH PLAIN ENDS

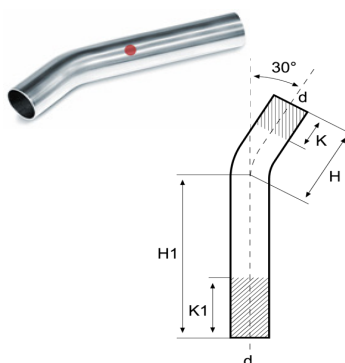


Part. No.	d	H1	H	K	K1	weight gramm	bag quantity	min. lot
C74AB	12	122	60	21	83	71	*	20
C74AC	15	122	60	21	83	92	*	20
C74AD	18	128	55	16	89	88	*	20
C74AE	22	124	50	6	80	130	*	20
C74AF	28	130	54	7	47	176	*	20
C74AG	35	218	80	30	110	362	*	15
C74AH	42	274	98	44	144	551	*	8
C74AJ	54	324	137	65	165	886	*	8
C74AK	76,1	200	202	66	66	1.413	*	3
C74AL	88,9	262	264	80	80	2.209	*	3
C74AM	108	259	272	95	95	2.554	*	3

BEND 45° WITH PLAIN ENDS




Part. No.	d	H1	H	K	K1	weight gramm	bag quantity	min. lot
C73AB	12	120	62	19	77	70	*	20
C73AC	15	120	62	19	77	92	*	20
C73AD	18	124	58	16	82	88	*	20
C73AE	22	120	56	7	71	130	*	20
C73AF	28	122	58	2	66	170	*	20
C73AG	35	206	94	20	132	366	*	12
C73AH	42	262	114	1	149	538	*	8
C73AJ	54	321	146	37	212	889	*	8
C73AK	76,1	225	225	69	69	1.660	*	3
C73AL	88,9	267	267	103	103	2.270	*	3
C73AM	108	293	293	66	66	3.022	*	3

BEND 60° WITH PLAIN ENDS




Part. No.	d	H1	H	K	K1	weight gramm	bag quantity	min. lot
C72AB	12	122	60	21	83	70	*	20
C72AC	15	122	60	21	83	90	*	20
C72AD	18	122	62	16	76	110	*	20
C72AE	22	118	60	5	63	130	*	20
C72AF	28	116	71	7	47	176	*	10
C72AG	35	226	101	30	110	396	*	8
C72AH	42	251	124	44	145	544	*	8
C72AJ	54	308	162	65	165	857	*	8
C72AK	76,1	219	223	70	70	1.537	*	3
C72AL	88,9	250	257	80	80	2.090	*	3
C72AM	108	288	298	95	95	2.542	*	3

BEND 90° WITH PLAIN ENDS



Part. No.	d	H1	H	K	K1	weight gramm	bag quantity	min. lot
C70AB	12	120	70	17	67	70	*	80
C70AC	15	120	70	22	72	90	*	80
C70AD	18	120	70	17	67	100	*	60
C70AE	22	120	70	9	59	126	*	60
C70AF	28	125	97	7	47	191	*	40
C70AG	35	201	121	62	62	359	*	24
C70AH	42	254	160	90	90	530	*	24
C70AJ	54	302	202	45	45	867	*	20
C70AK	76,1	250	250	62	60	1.634	*	5
C70AL	88,9	291	291	90	90	2.240	*	5
C70AM	108	364	364	45	45	3.170	*	5

WELDING JOINT**




** Not galvanised.

Correct conditions of use have to be requested from our technical department


Part. No.	d	L	weight gramm	bag quantity	min. lot
C17AB-LBP	12	23	14	*	120
C17AC-LBP	15	25	16	*	100
C17AD-LBP	18	25	20	*	80
C17AE-LBP	22	27	28	*	60
C17AF-LBP	28	30	35	*	40
C17AG-LBP	35	34	53	*	40
C17AH-LBP	42	38	70	*	20
C17AJ-LBP	54	44	96	*	20
C17AK	76,1	68	290	*	10
C17AL	88,9	78	397	*	10
C17AM	108	94	584	*	10

SINGLE CROSSING

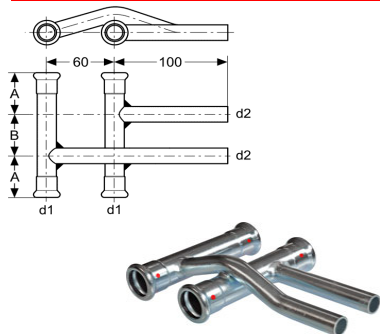

Part. No.	d1-d2	A	B	weight gramm	bag quantity	min. lot
C91BB-LBP	12-12	30	40	188	*	20
C91BC-LBP	15-12	40	40	234	*	20
C91CC-LBP	15-15	40	40	255	*	20
C91BD-LBP	18-12	40	40	262	*	20
C91CD-LBP	18-15	40	40	284	*	20
C91BE-LBP	22-12	40	40	304	*	20
C91CE-LBP	22-15	40	40	327	*	20
C91BF-LBP	28-12	40	40	430	*	20
C91CF-LBP	28-15	40	40	380	*	20


DOUBLE CROSSING

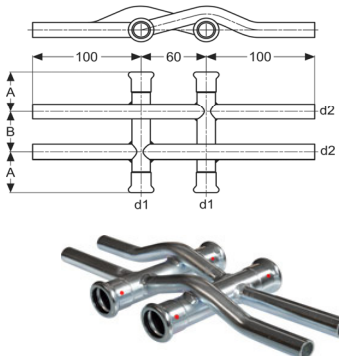


Part. No.	d1-d2	A	B	weight gramm	bag quantity	min. lot
C90BB-LBP	12-12	30	40	230	*	20
C90BC-LBP	15-12	40	40	315	*	20
C90CC-LBP	15-15	40	40	360	*	20
C90BD-LBP	18-12	40	40	358	*	20
C90CD-LBP	18-15	40	40	399	*	20
C90BE-LBP	22-12	40	40	366	*	20
C90CE-LBP	22-15	40	40	422	*	20
C90BF-LBP	28-12	40	40	440	*	20
C90CF-LBP	28-15	40	40	487	*	20
C90CG-LBP	35-15	40	40	528	*	20

PROFILE


M

**SEAL RING EPDM black
for DRINKABLE WATER**
Approved by DVGW 543


Part No.	Ø	E	C	weight gramm	min. lot
000719	12	12	2,4	0,3	150
000720	15	15	2,6	0,3	150
000721	18	18	2,6	0,4	150
000722	22	22	3,2	0,7	150
000723	28	28	3,1	0,8	150
000724	35	35	3,1	1,0	100
000725	42	42	4,1	2,2	100
000726	54	54	4,1	2,8	100
000727	76,1	76,8	8	11,5	50
000728	88,9	89,3	8,2	17,5	50
000729	108	108,6	11	33,8	50


**SEAL RING EPDM black
for DRINKABLE WATER**
LBP approved by DVGW 543


POLYGONAL




STANDARD

Part No.	Ø	E	C	weight gramm	min. lot
008875	12	12	2,4	0,3	150
008876	15	15	2,6	0,3	150
008877	18	18	2,6	0,4	150
008878	22	22	3,2	0,7	150
008879	28	28	3,1	0,8	150
008880	35	35	3,1	1,0	100
008881	42	42	4,1	2,2	100
008882	54	54	4,1	2,8	100
000727	76,1	76,8	8	11,5	50
000728	88,9	89,3	8,2	17,5	50
000729	108	108,6	11	33,8	50

**SEAL RING FPM red for OIL
and HYDROCARBON UNTIL 180°C***


Part No.	Ø	E	C	weight gramm	min. lot
007496	12	12	2,4	0,3	100
007243	15	15	2,6	0,3	100
007244	18	18	2,6	0,4	100
007245	22	22	3,2	0,7	100
007246	28	28	3,1	0,8	100
007247	35	35	3,1	1,0	50
007248	42	42	4,1	2,2	50
007249	54	54	4,1	2,8	50
007250	76,1	76,8	8	11,5	20
007251	88,9	89,3	8,2	17,5	20
007252	108	108,6	11	33,8	20

* Please contact us before sending orders


**SEAL RING FPM green
for SOLAR SYSTEMS, OIL and
HYDROCARBON UNTIL 180°C***


Part No.	Ø	E	C	weight gramm	min. lot
002485	12	12	2,4	0,3	100
002849	15	15	2,6	0,3	100
002850	18	18	2,6	0,4	100
002851	22	22	3,2	0,7	100
002852	28	28	3,1	0,8	100
002853	35	35	3,1	1,0	50
002854	42	42	4,1	2,2	50
002855	54	54	4,1	2,8	50
002983	76,1	76,8	8	11,5	20
002984	88,9	89,3	8,2	17,5	20
002985	108	108,6	11	33,8	20

* Please contact us before sending orders


SEAL RING HNBR yellow for GAS

STANDARD for stainless steel gas



Part No.	Ø	E	C	weight gramm	min. lot
002579	15	15	2,6	0,3	150
002580	18	18	2,6	0,4	150
002581	22	22	3,2	0,7	150
002582	28	28	3,1	0,8	150
002583	35	35	3,1	1,0	100
002584	42	42	4,1	2,2	100
002585	54	54	4,1	2,8	100
003266	76,1	76,8	8	11,5	50
003267	88,9	89,3	8,2	17,5	50
003268	108	108,6	11	33,8	50


FLAT GASKET EPDM black for DRINKABLE WATER



Big Sizes available upon request,
please contact our Sales Dept.

Part No.	Ø	A	B	C	weight gramm	min. lot
002409	15	15	23	2	0,5	100
002409	18	15	23	2	0,5	100
002410	22	22,5	29,6	2	0,7	100
002411	28	27	38,6	2	1,4	100
002412	35	35	44,6	2	1,3	50
002413	42	40	50,6	2	1,7	50
002414	54	53,5	67	3	4,0	50


FLAT GASKET FPM green for SOLAR SYSTEMS, OIL and HYDROCARBON UNTIL 180°C*



Big Sizes available upon request,
please contact our Sales Dept.

Part No.	Ø	A	B	C	weight gramm	min. lot
004992	15	15	23	2	0,5	100
004992	18	15	23	2	0,5	100
004993	22	22,5	29,6	2	0,7	100
004994	28	27	38,6	2	1,4	100
004995	35	35	44,6	2	1,3	50
004996	42	40	50,6	2	1,7	50
004997	54	53,5	67	3	4,0	30


FLAT GASKET HNBR yellow for GAS



Big Sizes available upon request,
please contact our Sales Dept.

Part No.	Ø	A	B	C	weight gramm	min. lot
003237	15	15	23	2	0,5	100
003237	18	15	23	2	0,5	100
003238	22	22,5	29,6	2	0,7	100
003239	28	27	38,6	2	1,4	100
003240	35	35	44,6	2	1,3	50
003241	42	40	50,6	2	1,7	50
003242	54	53,5	67	3	4,0	50

INSERTION DEPTH TOOL

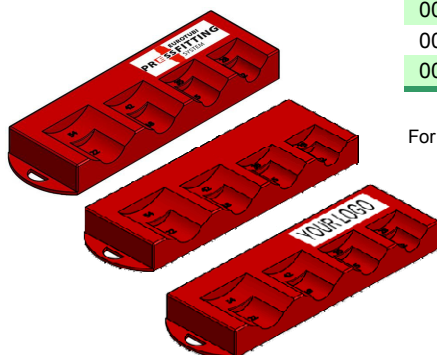

Part No.		min. lot
008021	with Eurotubi logo	100
008022	without logo	100
008023	with the customized logo	1.000

For further info please contact our Sales Dept.

Please email us in order to receive an updated offer! info@vimoter.it

AISI 316L

Stainless steel pipes type 1.4404 with
DVGW approval for tapwater and gas and
VdS approval for Sprinkler Systems.



The VdS approval is bound to the use of
Eurotubi Pressfitting pipes and fittings

Vimoter Part. No.	ext. Ø [mm]	Thickness [mm]	Length [m]	Weight [kg/m]	bundle m [6m bars]
TUICR015	15	1	6	0,351	1.014
TUICR018	18	1	6	0,426	1.014
TUICR022	22	1,2	6	0,625	762
TUICR028	28	1,2	6	0,805	546
TUICR035	35	1,5	6	1,258	546
TUICR042	42	1,5	6	1,521	366
TUICR054	54	1,5	6	1,972	366
TUICR076	76,1	2	6	3,711	222
TUICR088	88,9	2	6	4,352	114
TUICR108	108	2	6	5,308	108

AISI 304

Stainless steel pipes type 1.4307 for
industrial applications, compressed air,
heating and cooling.



Vimoter Part. No.	ext. Ø [mm]	Thickness [mm]	Length [m]	Weight [kg/m]	bundle m [6m bars]
TUICR304-015	15	1	6	0,351	1.302
TUICR304-018	18	1	6	0,426	1.014
TUICR304-022	22	1,2	6	0,625	1.014
TUICR304-028	28	1,2	6	0,805	546
TUICR304-035	35	1,5	6	1,258	366
TUICR304-042	42	1,5	6	1,521	234
TUICR304-054	54	1,5	6	1,972	234
TUICR304-076	76,1	2	6	3,711	168
TUICR304-088	88,9	2	6	4,352	168
TUICR304-108	108	2	6	5,308	108

For FERRITIC STAINLESS steel pipes type 1.4520 please contact us directly.

PRESSING TOOLS AND JAWS

Eurotubi Pressfitting System
is compatible with the tools of
several producers on the
market.



Please email us in order to receive an updated offer! info@vimoter.it

EXTERNAL GALVANIZING

CARBON steel pipes according to EN 10305-3, external galvanizing 8 micron.

Available bars: 5 and 6 m.



Vimoter Part. No.	ext. Ø [mm]	Thickness [mm]	Length [m]	Weight [kg/m]	bundle m [5m bars]	bundle m [6m bars]
TUCZ012-6	12	1,2	5m/6m	0,319	520	624
TUCZ015-6	15	1,2	5m/6m	0,408	1.075	1.290
TUCZ018-6	18	1,2	5m/6m	0,497	1.270	1.524
TUCZ022-6	22	1,5	5m/6m	0,758	1.075	1.290
TUCZ028-6	28	1,5	5m/6m	0,980	520	624
TUCZ035-6	35	1,5	5m/6m	1,239	335	402
TUCZ042-6	42	1,5	5m/6m	1,498	335	402
TUCZ054-6	54	1,5	5m/6m	1,942	305	366
TUCZ076-6	76,1	2	6m	3,655		222
TUCZ088-6	88,9	2	6m	4,286		222
TUCZ108-6	108	2	6m	5,228		114

INTERNAL AND EXTERNAL GALVANIZING

CARBON steel pipes according to EN 10305-3, internal and external galvanizing.



Ø 22-108

The VdS approval is bound to the use of Eurotubi Pressfitting pipes and fittings

Vimoter Part. No.	ext. Ø [mm]	Thickness [mm]	Length [m]	Weight [kg/m]	bundle m [5m bars]	bundle m [6m bars]
TUCZI015	15	1,2	6m	0,408		1.290
TUCZI018	18	1,2	6m	0,497		1.524
TUCZI022	22	1,5	6m	0,758		1.290
TUCZI028	28	1,5	6m	0,980		624
TUCZI035	35	1,5	6m	1,239		402
TUCZI042	42	1,5	6m	1,498		402
TUCZI054	54	1,5	6m	1,942		366
TUCZI076	76,1	2	6m	3,655		222
TUCZI088	88,9	2	6m	4,286		222
TUCZI108	108	2	6m	5,228		114

PP-COATED PIPES

CARBON steel pipes outside galvanized and PP-coated.



Vimoter Part. No.	ext. Ø [mm]	Thickness [mm]	Length [m]	Weight [kg/m]	bundle m [5m bars]	bundle m [6m bars]
TUCZPP012	12	1,2	6m	0,319		1.884
TUCZPP015	15	1,2	6m	0,408		1.488
TUCZPP018	18	1,2	6m	0,497		1.212
TUCZPP022	22	1,5	6m	0,758		810
TUCZPP028	28	1,5	6m	0,980		624
TUCZPP035	35	1,5	6m	1,239		462
TUCZPP042	42	1,5	6m	1,498		402
TUCZPP054	54	1,5	6m	1,942		306

PRESSFITTING SYSTEM ADVANTAGES

- Extreme simplicity and quickness of installation
- Low installation costs
- High corrosion resistance
- Highest hygiene level (stainless steel)
- Structural solidity
- Long-term durability
- Ideal for visible installations
- Wide range of fittings, from Ø12 to Ø108 mm

"GREEN" FEATURES

- Pipes and fittings have a thinner wall thickness: this results in a remarkable energy saving both during production and goods handling
- Minimum energy consumption during installation
- No release of pollutants
- Reduced noise pollution
- 100% recyclable material
- Ecological packaging

The properties of STEEL combined with PRESSFITTING technology represent the EXCELLENCE of modern installation technique.

EUROTUBI EUROPA'S VALUES

• Quality

Quality is our priority. Our quality management system is ISO 9001-2008 certified, while the Eurotubi Pressfitting System has obtained approvals from the most important international certification bodies, achieving excellent results in the most severe tests.

• Own production

Eurotubi pressfittings are produced entirely in Italy. Full autonomy in the production process is a further quality assurance.

• "M" and "V" Profile

Eurotubi is among the few companies in the world producing pressfittings both "M" and "V" profile.

• Innovation

Con importanti piani di investimento Eurotubi è With important investment plans Eurotubi is constantly focused on updating its technology, renewing equipment and staff training.

• Customization

Marking and packaging procedures can be customized according to specific customer requirements.

• Worldwide market knowledge

Eurotubi is an export-oriented company with good knowledge of its market and a solid experience in international relations.

• After-sales service

Thanks to highly qualified personnel, Eurotubi is able to offer its customers a valuable consultancy and after-sales service.

• Communication

Eurotubi offers a monthly newsletter with news and technical insights. Cultivating relationships with the public by providing useful information is a key factor in acquiring and loyalizing customers.

• Reliability in time

Installations made with Eurotubi pressfittings, using the correct pressing tools, approved pipes and rigorously following the Technical Guide, may last for at least 20 years.

This indication is not a legal guarantee. With regard to the seller's guarantees, our company and our products strictly adhere to the provisions of law.

V-PROFILE

CARBON STEEL



"V" PROFILE

The Eurotubi Pressfitting System catalogue includes the complete range of "V" profile fittings, from Ø15mm to Ø54mm, both in CARBON STEEL (with SITAC approval) and STAINLESS STEEL (with DVGW approval)

V-PROFILE


STAINLESS STEEL AISI 316L



NEW!

SPECIAL PARTS

Eurotubi is able to make special parts (in carbon steel or stainless steel, with M or V profile) based on the customer's drawing, with pressfitting terminals and / or groove fittings and to effectively manage small and large orders. Ask for the Special Part's catalogue to: info@eurotubieuropa.it

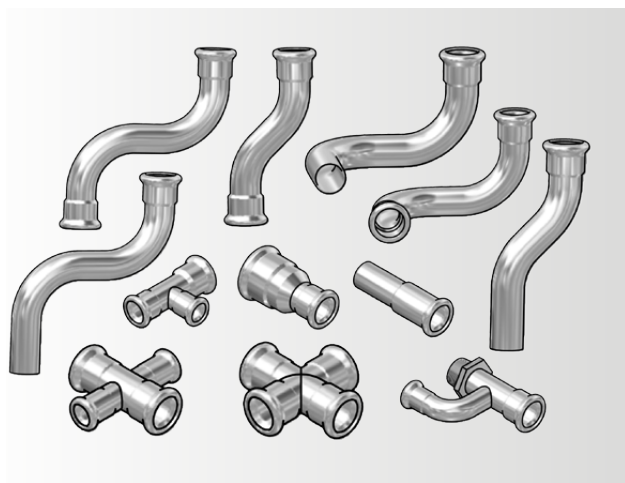

Updates in the current Pricelist 28 - March 2019 (Compared to the previous edition 28 - July 2017)

1) The dimensions of the following items updated:

- S62TH, S62VJ, S63TH, S63VJ, S64VJ, S65VJ, all the items S66 and S68;
- G61QC, G61QD, G60YF, G61YF, G62TH, G62VJ, G63TH, G63VJ, G64VJ, G65VJ;
- C12EB, all the items C60, C62 and C64.

2) The WEIGHT of the items S80QD and S80PE updated.

3) APPROVAL list updated.

4) The PRICES of the items C13 updated and the item C13AB removed.



Via Croce Rossa Italiana, 12
20834 NOVA MILANESE (MB) - Italy
Tel. +39 0362 365068 - fax +39 0362 41099
www.eurotubieuropa.it
info@eurotubieuropa.it