


T ADAPTER DIN MALE/DIN MALE/BSPT MALE

ADATTATORE T MASCHIO DIN – MASCHIO GAS CONICO AL PIEDE
 TÊ MÂLE DIN/DIN/BSPT
 T-EINSCHRAUBVERSCHRAUBUNG – 2 X DIN 24° / AGR-K UNTEN
 RACOR EN T DIN/DIN/BSPT

F1 Metrisch, Metrico, Metric, Métrique, Métrico

F2 Keglige-Gasgewinde, Gas conico, BSPT, Gaz conique, Rosca conica

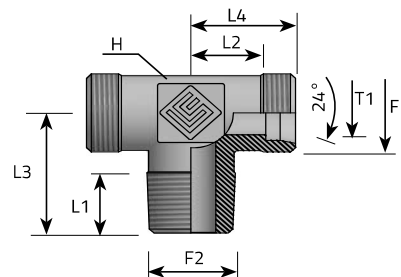

	Code	Thread		Dimensions						Pressure		Series
		F1	F2	T1	H	L1	L2	L3	L4	Bar	Psi	
				mm	mm	mm	mm	mm	mm			L/S
	TME06LMGK02P.1	12X1,5	1/8"	6	12	8	12	20	19	315	4568	L
	TME08LMGK04P.1	14X1,5	1/4"	8	12	12	14	26	21	315	4568	L
	TME10LMGK04P.1	16X1,5	1/4"	10	14	12	15	27	22	315	4568	L
	TME12LMGK06P.1	18X1,5	3/8"	12	17	12	17	28	24	315	4568	L
	TME15LMGK08P.1	22X1,5	1/2"	15	19	14	21	34	28	315	4568	L
	TME18LMGK08P.1	26X1,5	1/2"	18	24	14	23,5	36	31	315	4568	L
	TME22LMGK12P.1	30X2	3/4"	22	27	16	27,5	47	35	160	2320	L
	TME28LMGK16P.1	36X2	1"	28	36	18	30,5	48	38	160	2320	L
	TME35LMGK20P.1	45X2	1.1/4"	35	41	20	34,5	54	45	160	2320	L
	TME42LMGK24P.1	52X2	1.1/2"	42	50	22	40	61	51	160	2320	L
	TME06SMGK04P.1	14X1,5	1/4"	6	12	12	16	26	23	630	9137	S
	TME08SMGK04P.1	16X1,5	1/4"	8	14	12	17	27	24	630	9137	S
	TME10SMGK06P.1	18X1,5	3/8"	10	17	12	17,5	28	25	630	9137	S
	TME12SMGK06P.1	20X1,5	3/8"	12	17	12	21,5	31	29	630	9137	S
	TME14SMGK08P.1	22X1,5	1/2"	14	19	14	22	32	30	630	9137	S
	TME16SMGK08P.1	24X1,5	1/2"	16	24	14	24,5	32	33	400	5801	S
	TME20SMGK12P.1	30X2	3/4"	20	27	16	26,5	47	37	400	5801	S
	TME25SMGK16P.1	36X2	1"	25	36	18	30	48	42	400	5801	S
	TME30SMGK20P.1	42X2	1.1/4"	30	41	20	35,5	54	49	400	5801	S
	TME38SMGK24P.1	52X2	1.1/2"	38	50	22	41	61	57	315	4568	S