


drylin® R liner JUMO-01

JUMO-01-10

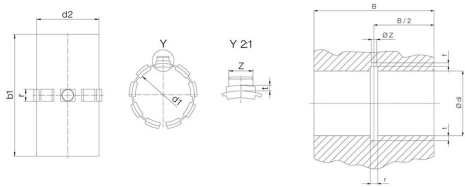

drylin® R liner JUMO-01

- Material: iglidur® J
- Version: long, open design
- For all shaft surfaces in indoor and outdoor use

r	3 mm
Ø z	2.5 mm
Ø di	12 mm
B	29 mm
Ø d1	10 mm
t	0.8 mm
Ø d2	12 mm
b1	28 mm

Product description

Introducing the drylin R liner JUMO-01 from the trusted brand igus. Crafted from high-quality iglidur J material, this liner features a long, open design suitable for all shaft surfaces, making it perfect for both indoor and outdoor applications. Experience durability and versatility with the drylin R liner JUMO-01, designed to meet your needs in any environment.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	Yes
---	-----

Physical properties

Max. long-term application temperature	90 °C
Lower application temperature	-50 °C

Manufacturing and installation tolerances

d1 tolerance	+0,030 +0,070mm
di tolerance	H7
B tolerance	h10
r1 tolerance	+0,05 mm
t1 tolerance	+0,1 mm
f1 tolerance	+0,5 mm



Dimensions

Ø d1	10 mm
Ø d2	12 mm
b1	28 mm
r	3 mm
t	0.8 mm
Ø z	2.5 mm
Ø di	12 mm
B	29 mm
t1	0.8 mm
f1	2.5 mm
Ø Z1	0.9 mm

Certificates and standards



Additional information and diagrams

