


drylin® R linear slide bearing RJUI-23, imperial

RJUI-23-06

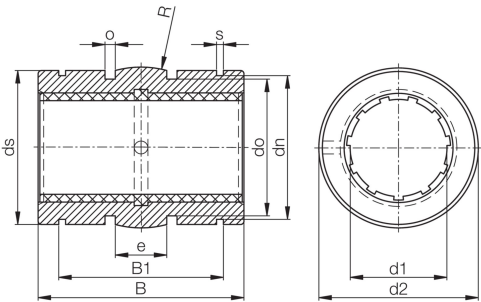

drylin® R linear slide bearing RJUI-23, imperial

- Hard anodized aluminum adapter
- Dimensionally interchangeable with linear ball bearings
- Equipped with liner made from iglide® J
- Temperature range -40°F to +194°F JUI-01 (standard), JUI-20 (low clearance)
- Best shafting for iglide® J: drylin® AWI aluminum, case-hardened, 300 series stainless
- Includes o-rings
- Secure by retaining clips (not included)

Part number	RJUI-23-06
Ø ds	0.6055 in
o	0.61 in
e	0.243 in
Ø d1	0.375 in
Ø d2	0.6173 in
B	0.8713 in
B1	0.652 in
s	0.41 in
Ø dn	0.587 in
Ø do	0.524 in

Product description

Introducing the drylin R linear slide bearing RJUI-23, imperial, designed for seamless performance. This bearing features a hard anodized aluminum adapter and is dimensionally interchangeable with linear ball bearings. It includes a durable liner made from iglide J, ensuring reliable operation in temperatures ranging from -40°F to +194°F. Ideal for use with drylin AWI aluminum and case-hardened stainless steel shafts, it also comes with o-rings for added security. Upgrade your setup with this efficient and versatile bearing.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	No
---	----

Manufacturing and installation tolerances

d1 tolerance	+0.000 +0.040mm
d2 tolerance	h8
B tolerance	h10
Housing bore (min.)	0.625 in
Housing bore (max.)	0.6257 in
dn tolerance	h10
o tolerance	-0,004 inch



Dimensions

Ø d1	0.375 in
Ø d2	0.6173 in
B	0.8713 in
B1	0.652 in
s	0.41 in
Ø dn	0.587 in
Ø ds	0.6055 in
Ø do	0.524 in
o	0.61 in
e	0.243 in

General properties

Sliding element material	iglidur_j
--------------------------	-----------