


drylin® flange lead screw nut with spanner flat,
trapezoidal thread, WFLM

WFRM-202020TR8X1.5

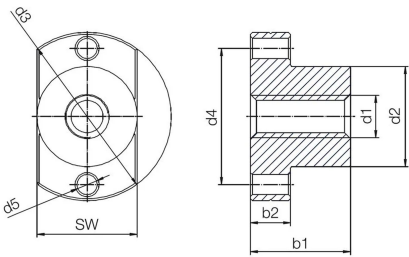

drylin® flange lead screw nut with spanner flat,
trapezoidal thread, WFLM

- Material: iglide® L280
- Thread direction: Right-hand thread
- Thread type: Trapezoidal threads
- Design: Standard
- Cylindrical lead screw nut with flange
- With spanner flat

Product description

Introducing the drylin® flange lead screw nut with spanner flat, WFLM from igus. Crafted from high-performance iglidur® W300 polymer, this nut excels in heavy-duty applications, offering exceptional wear resistance and static strength. Designed for low speeds and capable of withstanding temperatures up to +90°C, it operates quietly and requires no lubrication. Enjoy the benefits of a robust, chemical-resistant, and maintenance-free solution for your lead screw needs. Perfect for demanding environments!

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	No
---	----

Thermal properties

Efficiency [η]	19-33
----------------	-------

General properties

Thread direction	Right-hand thread
Thread type	Trapezoidal threads; absorption of larger axial forces
With spanner flat	Yes
Weight	10.13 g



Dimensions

Thread size	TR08X1.5
Ø d1	8 mm
Ø d2	20 mm
Ø d3	36 mm
Ø d4	28 mm
Ø d5	4 mm
b1	20 mm
b2	8 mm