


Inlet Air Temperature	[°C]	0.00	Evaporating temperature	[°C]	-8.00
DT	[K]	8.00	Refrigerant		CO2
Minimum number of units in room		0	Altitude	[m]	0.0
Heat exchanger	Aluminium fin		Casing	Standard	
Fan motor feed	Standard		Type of fan motor	AC motors	
Defrost	Absent				
Selected model:* 1 x CGC 251E4					
Capacity	[kW]	1.56	Margin	[%]	0.0
DT	[K]	8.0	Tot. air flow	[m³/h]	768.0
Tot. Pres.S.Lev.	[dB(A) @[m]]	37 (5m)			

* Provide an appropriate defrosting system and number of defrost cycles

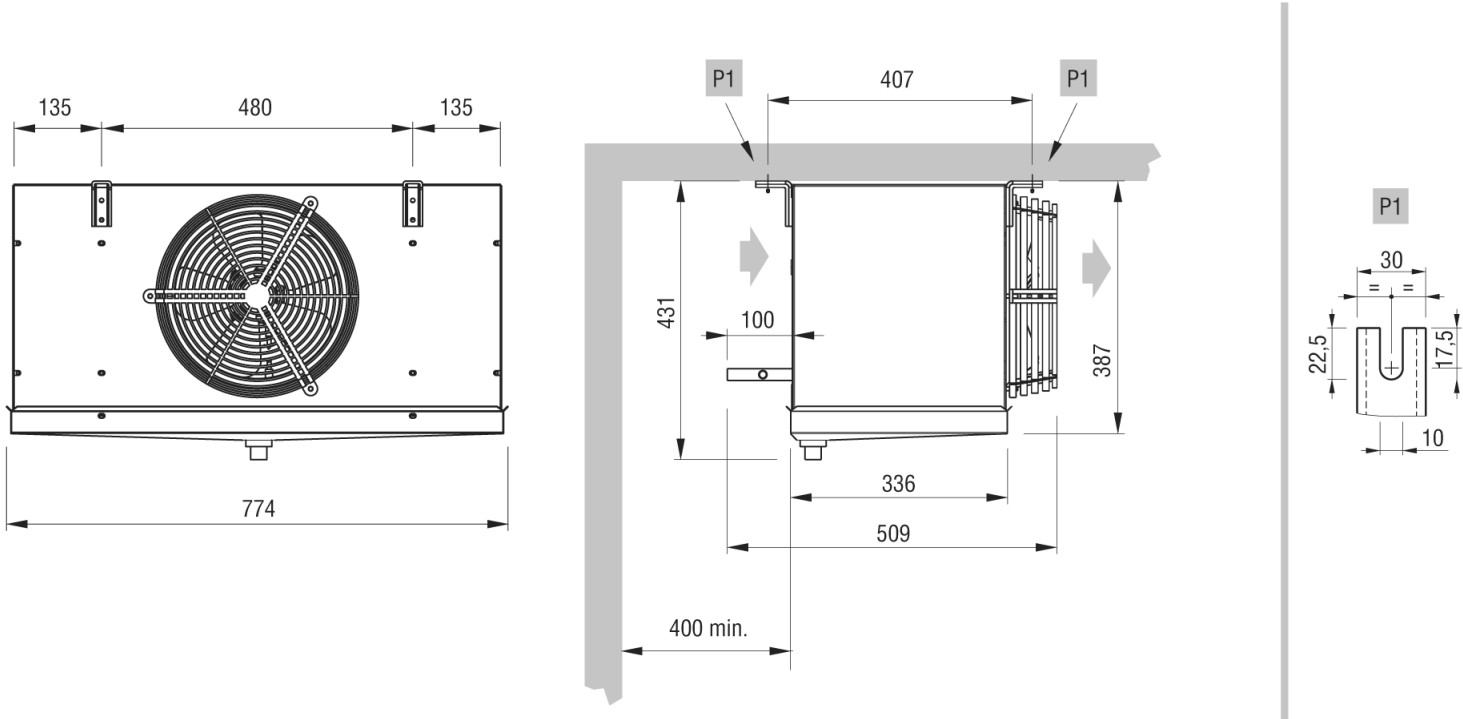

Weight	kg	16.000		[bar]	80
Internal surface	m²	0.46	External surface	m²	9.70
Inlet connection		12.7 mm	Output connection		12.7 mm
Total circuit capacity	dm³	1.1	Fin spacing	mm	4
Drain connection		1" GAS			
Fan Motors	n.	1	Diameter	mm	250
Air flow	m³/h	768	Air throw	m	8.0
Feed	V	230/1/50-60	Rotation speed	rpm	1300
Fan Motor	A	0.68	Absorbed power	W	95.0
Pres.S.Lev. 5 m.	dB(A)	37			