


DIN MALE STUD ELBOW-BSPP MALE ADJUSTABLE

GOMITO 90° MASCHIO DIN – MASCHIO GAS CILINDRICO ORIENTABILE
 COUDE ORIENTABLE AVEC CONTRE ÉCROU DIN/BSPP
 EINSTELLBARE WINKELVERSCHRAUBUNG 90° MIT KONTERMUTTER –
 24° METRISCH / AGR-Z
 RACOR ORIENTABLE CODO CON CONTRATUERCA DIN/BSPP

F1 Metrisch, Metrico, Metric, Métrique, Métrico

F2 Zylinder-Gasgewinde, Gas cilíndrico, BSPP, Gaz cylindrique,
 Gas cilíndrica

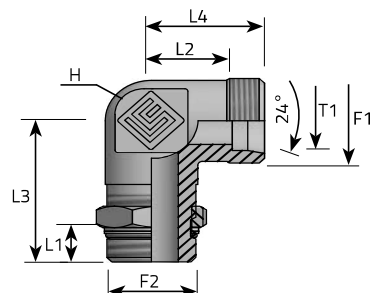

Code	Thread		Dimensions							Pressure		Series
	F1	F2	T1	H	L1	L2	L3	L4		Bar	Psi	L/S
			mm	mm	mm	mm	mm	mm				
LME06LMOG02.1	12X1,5	1/8"	6	14	6,3	14	20,2	21		315	4568	L
LME08LMOG04.1	14X1,5	1/4"	8	14	9,5	16	22,5	23		315	4568	L
LME10LMOG04.1	16X1,5	1/4"	10	14	9,5	15	24,5	22		315	4568	L
LME12LMOG06.1	18X1,5	3/8"	12	19	9,5	19	27,5	26		250	3626	L
LME15LMOG08.1	22X1,5	1/2"	15	22	13	21	30	28		250	3626	L
LME18LMOG08.1	26X1,5	1/2"	18	27	13	24	36,5	31,5		250	3626	L
LME22LMOG12.1	30X2	3/4"	22	27	13	28	37,5	35,5		160	2320	L
LME28LMOG16.1	36X2	1"	28	33	16	31	41	38,5		160	2320	L
LME35LMOG20.1	45X2	1.1/4"	35	41	16	38	49	48,5		160	2320	L
LME42LMOG24.1	52X2	1.1/2"	42	48	16	38	51	49		160	2320	L
LME06SMOG04.1	14X1,5	1/4"	6	14	9,5	15,5	22,5	22,5		315	4568	S
LME08SMOG04.1	16X1,5	1/4"	8	14	9,5	18	26,5	25		315	4568	S
LME10SMOG06.1	18X1,5	3/8"	10	19	9,5	18	28,5	25,5		250	3626	S
LME12SMOG06.1	20X1,5	3/8"	12	19	9,5	22	28,5	29,5		250	3626	S
LME14SMOG08.1	22X1,5	1/2"	14	22	13	22	31	30		250	3626	S
LME16SMOG08.1	24X1,5	1/2"	16	27	13	25	36	33,5		250	3626	S
LME20SMOG12.1	30X2	3/4"	20	27	13	28	38	38,5		250	3626	S
LME25SMOG16.1	36X2	1"	25	33	16	30,5	41	42,5		250	3626	S
LME30SMOG20.1	42X2	1.1/4"	30	41	16	36	48	49,5		160	2320	S
LME38SMOG24.1	52X2	1.1/2"	38	48	16	34	53	50		160	2320	S