


## EV Swivel nut 45° elbow

EO 24° cone end / EO 24° DKO swivel

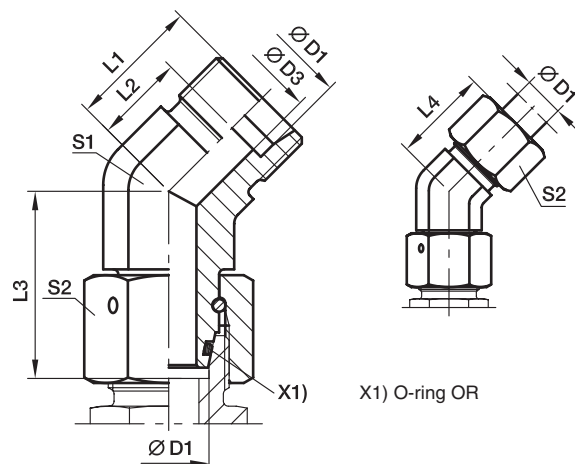

| Series          | D1<br> | D3 | L1   | L2   | L3   | L4 | S1 | S2 | Weight<br>g/1 piece | Order code* | PN (bar) <sup>1)</sup> |     |
|-----------------|--------|----|------|------|------|----|----|----|---------------------|-------------|------------------------|-----|
|                 |        |    |      |      |      |    |    |    |                     |             | CF                     | 71  |
| L <sup>3)</sup> | 06     | 4  | 16.0 | 9.0  | 26.0 | 24 | 14 | 14 | 37                  | EV06LOMD    | 315                    | 315 |
|                 | 08     | 6  | 19.0 | 12.0 | 27.5 | 27 | 14 | 17 | 49                  | EV08LOMD    | 315                    | 315 |
|                 | 10     | 8  | 19.0 | 12.0 | 29.0 | 27 | 19 | 19 | 77                  | EV10LOMD    | 315                    | 315 |
|                 | 12     | 10 | 21.0 | 14.0 | 29.5 | 29 | 19 | 22 | 86                  | EV12LOMD    | 315                    | 315 |
|                 | 15     | 12 | 24.0 | 17.0 | 32.5 | 32 | 22 | 27 | 144                 | EV15LOMD    | 315                    | 315 |
|                 | 18     | 15 | 24.0 | 16.5 | 35.5 | 33 | 27 | 32 | 210                 | EV18LOMD    | 315                    | 315 |
|                 | 22     | 19 | 26.0 | 18.5 | 38.5 | 35 | 30 | 36 | 270                 | EV22LOMD    | 160                    | 160 |
|                 | 28     | 24 | 30.5 | 23.0 | 41.5 | 40 | 36 | 41 | 385                 | EV28LOMD    | 160                    | 160 |
|                 | 35     | 30 | 37.0 | 26.5 | 51.0 | 48 | 50 | 50 | 805                 | EV35LOMD    | 160                    | 160 |
|                 | 42     | 36 | 37.0 | 26.0 | 56.0 | 49 | 50 | 60 | 887                 | EV42LOMD    | 160                    | 160 |
| S <sup>4)</sup> | 06     | 4  | 16.0 | 9.0  | 27.0 | 24 | 14 | 17 | 50                  | EV06SOMD    | 630                    | 630 |
|                 | 08     | 5  | 19.0 | 12.0 | 27.5 | 27 | 19 | 19 | 80                  | EV08SOMD    | 630                    | 630 |
|                 | 10     | 7  | 21.0 | 13.5 | 30.0 | 30 | 19 | 22 | 95                  | EV10SOMD    | 630                    | 630 |
|                 | 12     | 8  | 24.0 | 16.5 | 31.0 | 33 | 22 | 24 | 137                 | EV12SOMD    | 630                    | 630 |
|                 | 16     | 12 | 24.0 | 15.5 | 36.5 | 34 | 27 | 30 | 217                 | EV16SOMD    | 400                    | 400 |
|                 | 20     | 16 | 26.5 | 16.0 | 44.5 | 38 | 30 | 36 | 313                 | EV20SOMD    | 400                    | 400 |
|                 | 25     | 20 | 30.5 | 18.5 | 50.0 | 43 | 36 | 46 | 529                 | EV25SOMD    | 400                    | 400 |
|                 | 30     | 25 | 37.0 | 23.5 | 55.0 | 50 | 50 | 50 | 940                 | EV30SOMD    | 400                    | 400 |
|                 | 38     | 32 | 37.0 | 21.0 | 63.0 | 52 | 50 | 60 | 1055                | EV38SOMD    | 315                    | 315 |

<sup>1)</sup> Pressure shown = item deliverable

<sup>3)</sup> L = light series; <sup>4)</sup> S = heavy series

PN (bar)  
10 = PN (MPa)

Delivery without nut and ring. Information on ordering complete fittings or alternative sealing materials see page I7.

\*Please add the **suffixes** below according to the material/surface required.

| Order code suffixes             |                             |            |                                                         |
|---------------------------------|-----------------------------|------------|---------------------------------------------------------|
| Material                        | Suffix surface and material | Example    | Standard sealing material (no additional suffix needed) |
| Steel, zinc plated, Cr(VI)-free | CF                          | EV16SOMDCF | NBR                                                     |
| Stainless Steel                 | 71                          | EV16SOMD71 | VIT                                                     |