





Aluminium [AlMg2,5 ø2,4-3,2]
Polished [AlMg3,5 ø4,0-6,4]



Steel
Zinc plated

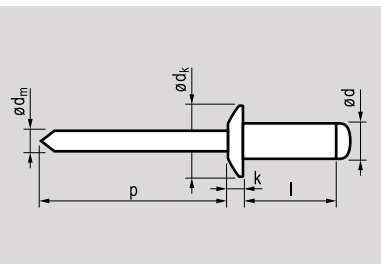

open type | dome head



Ø d	l		Item nr.	Ø d _k	k	Ø d _m	p		
[mm]	[+1/-0,2]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
2,4	4,0	~2,0	10312404						
[+0,08/-0,10]	6,0	2,0-4,0	2406						
	8,0	4,0-6,0	2408	5,0	0,7	~1,45	≥27	355	315
Ø 2,5	10,0	6,0-8,0	2410	[+0/-0,7]	[+/-0,15]				
3,0	4,0	~1,5	10313004						
[+0,08/-0,10]	6,0	1,5-3,0	3006						
	8,0	3,0-5,0	3008						
Ø 3,1	10,0	5,0-7,0	3010	6,5	0,8	~1,75	≥27	810	620
	12,0	7,0-9,0	3012	[+0/-0,7]	[+/- 0,2]				
	14,0	9,0-11,0	3014						
	16,0	11,0-13,0	3016						
3,2	4,0	~1,5	10313204						
[+0,08/-0,10]	6,0	1,5-3,5	3206						
	8,0	3,5-5,5	3208						
Ø 3,3	10,0	5,5-7,5	3210						
	12,0	7,5-9,5	3212	6,5	0,8	~1,75	≥27	980	760
	14,0	9,5-11,5	3214	[+0/-0,7]	[+/- 0,2]				
	16,0	11,5-13,5	3216						
	18,0	13,5-15,5	3218						
	20,0	15,5-17,5	3220						
4,0	6,0	1,5-3,0	10314006						
[+0,08/-0,15]	8,0	3,0-5,0	4008						
	10,0	5,0-6,5	4010						
Ø 4,1	12,0	6,5-8,5	4012						
	14,0	8,5-10,5	4014	8,0	1,0	~2,10	≥27	1.600	1.200
	16,0	10,5-12,5	4016	[+0/-1,0]	[+/- 0,3]				
	18,0	12,5-14,5	4018						
	20,0	14,5-16,5	4020						
	23,0	16,5-19,0	4023						
	25,0	19,0-21,5	4025						



Aluminium [AlMg3,5]
Polished



Steel
Zinc plated

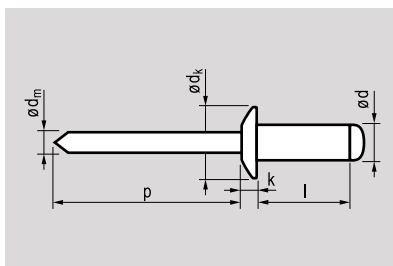

open type | dome head



Ø d	l		Item nr.	Ø d _k	k	Ø d _m	p		
[mm]	[+1/-0,2]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
4,8	6,0	1,0-3,0	10314806						
[+0,08/-0,15]	8,0	3,0-4,5	4808						
	10,0	4,5-6,0	4810						
Ø 4,9	12,0	6,0-8,0	4812						
	14,0	8,0-10,0	4814						
	16,0	10,0-12,0	4816						
	18,0	12,0-14,0	4818	9,5	1,1	~2,70	≥27	2.230	1.690
	20,0	14,0-16,0	4820	[+0/-1,0]	[+/- 0,3]				
	22,0	16,0-18,0	4822						
	25,0	18,0-21,0	4825						
	28,0	21,0-23,5	4828						
	30,0	23,5-25,0	4830						
	35,0	25,0-30,0	4835						
	40,0	30,0-35,0	4840						
5,0	6,0	1,0-3,0	10315006						
[+0,08/-0,15]	8,0	3,0-4,5	5008						
	10,0	4,5-6,0	5010						
Ø 5,1	12,0	6,0-8,0	5012						
	14,0	8,0-10,0	5014						
	16,0	10,0-12,0	5016						
	18,0	12,0-14,0	5018	9,5	1,1	~2,70	≥27	2.500	2.000
	21,0	14,0-17,0	5021	[+0/-1,0]	[+/- 0,3]				
	25,0	17,0-20,0	5025						
	27,0	20,0-23,0	5027						
	30,0	23,0-25,0	5030						
	35,0	25,0-30,0	5035						
	40,0	30,0-35,0	5040						
6,0	8,0	2,0-4,0	10316008						
[+0,08/-0,15]	10,0	4,0-6,0	6010						
	12,0	6,0-8,0	6012						
Ø 6,1	14,0	7,0-9,0	6014						
	16,0	9,0-11,0	6016	12,0	1,5	~3,20	≥31	3.900	3.000
	18,0	11,0-13,0	6018	[+0/-1,5]	[+/- 0,4]				
	22,0	13,0-17,0	6022						
	26,0	17,0-20,0	6026						
	30,0	20,0-24,0	6030						



Aluminium [AlMg3,5]
Polished



Steel
Zinc plated

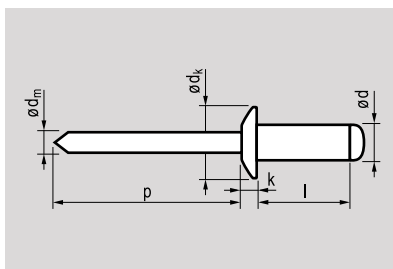

open type I dome head

Ø d	l		Item nr.	Ø d _k	k	Ø d _m	p		
[mm]	[+1/-0,2]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
6,4	10,0	2,0-5,0	10316410	13,0 [+0/-1,5]	1,8 [+/- 0,4]	~3,85	≥31	4.090	3.120
[+0,08/-0,15]	12,0	4,0-6,0	6412						
	15,0	6,0-9,0	6415						
Ø 6,5	18,0	9,0-13,0	6418						
	22,0	13,0-16,0	6422						
	26,0	16,0-20,0	6426						
	30,0	18,0-24,0	6430						