

DATA SHEET	54113002
SKINTOP® SDV-M / SDVR-M ATEX	valid from : 15.1.2016

The SKINTOP® SDV-M / SDVR-M ATEX is a sealing insert for secure and permanent sealing in explosion endangered areas.

The SKINTOP® SDV-M ATEX / SDVR-M ATEX are to be used together with the cable glands SKINTOP® MS-M / MSR-M ATEX or SKINTOP® K-M / KR-M ATEX.



Technical features:

Material	CR	
Sizes	SDV-M	M12 up to M63
	SDVR-M	M16 up to M32
Colour	Black	
Protection class	IP66, IP68 – 10 bar, test acc. to EN 60529	
Temperature range	-30 °C up to +70 °C	
UV resistance	acc. to DIN EN ISO 4892-3	

Certifications:



Condition of certifications:


The sealing plugs SKINTOP® SDV-M / SDVR-M ATEX may only be used in combination with the appropriate cable glands SKINTOP® MS-M / MSR-M ATEX or SKINTOP® K-M / KR-M ATEX

Norm references:



For more information please see our current catalogue.

DATA SHEET	54113002
SKINTOP® SDV-M / SDVR-M ATEX	valid from : 15.1.2016

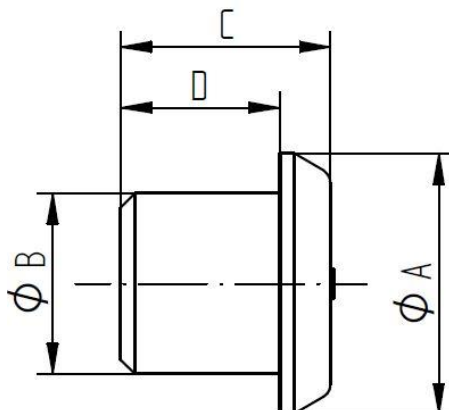

SKINTOP® SDV-M ATEX

Article designation	Ø A [mm]	Ø B [mm]	C [mm]	D [mm]	Article No.
SDV-M12 ATEX	10,5	5,8	12,5	9,5	54113002
SDV-M16 ATEX	13,5	9,3	13	10	54113012
SDV-M20 ATEX	18	12,5	14,5	11	54113022
SDV-M25 ATEX	21	16,5	15,5	12	54113032
SDV-M32 ATEX	26	20,5	19	15	54113042
SDV-M40 ATEX	33	27,5	22	18	54113052
SDV-M50 ATEX	40,5	35	27,5	23	54113062
SDV-M63 ATEX	51	44,5	31,5	27	54113072

SKINTOP® SDVR-M ATEX

Article designation	Ø A [mm]	Ø B [mm]	C [mm]	D [mm]	Article No.
SDVR-M16 ATEX	13,5	6,3	14	10	54113013
SDVR-M20 ATEX	18	9,3	16	11	54113023
SDVR-M25 ATEX	21	12,3	17	12	54113033
SDVR-M32 ATEX	26	14,3	20,5	15	54113043