

D02 gG 20A/400V



Specifications

ETI Code	002212001
Description	D02 gG 20A/400V
Class name	Fuse link
Rated current (A)	20
Type	D0
Size	D02
Characteristics	gG
Rated AC voltage (V)	400
Rated DC voltage (V)	250
Dimensions	E18
Indicator	Top fuse status indicator
Breaking capacity AC (kA)	50
Breaking capacity DC (kA)	8
Power dissipation (W)	2,7
Standards	DIN EN 60269-1, DIN EN 60269-3
Application	For cable protection

[Online product page](#) 


Other documentation

[Technical data catalogue](#)
[Certificate](#)
[3D Model](#)
[Instruction manual](#)
[CE declaration](#)

ETIM international clasification


Classification	EC001642
Class name	D0-system fuse link
Colour code	Blue
Construction size	D02
Nominal rated current	20A
Nominal rated voltage	400V
Utilization category	gL/gG (cable protection/equipment protection)

Characteristics

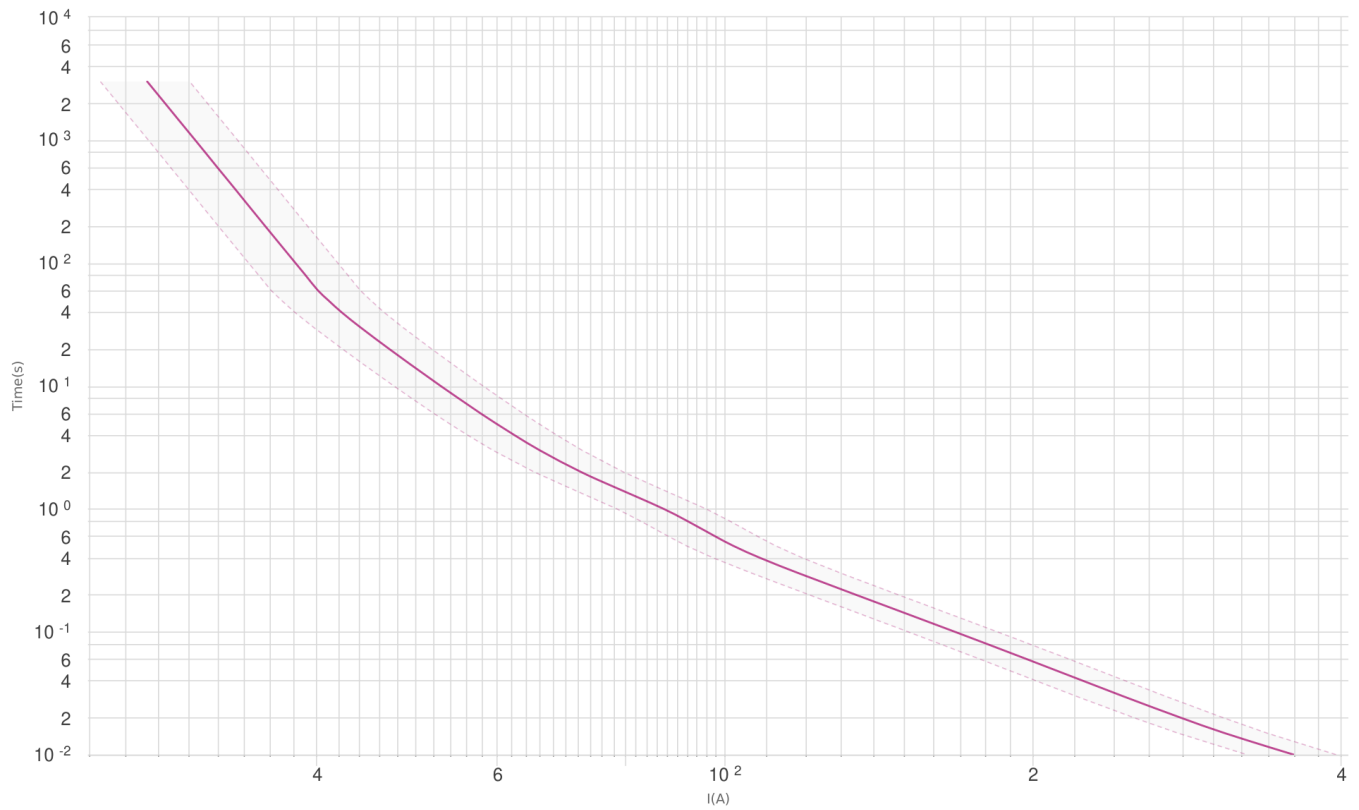


Melting energy characteristics


Melting energy characteristics I^2t

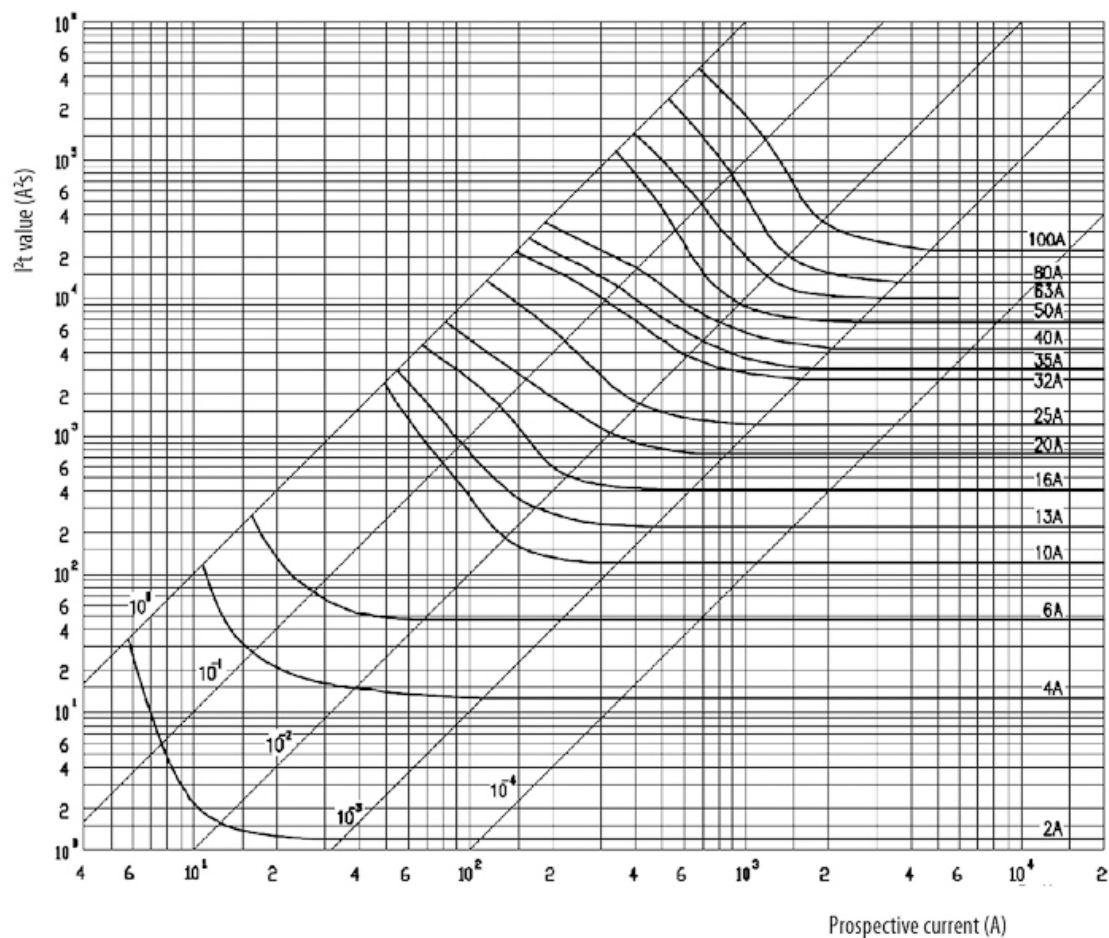

Characteristics

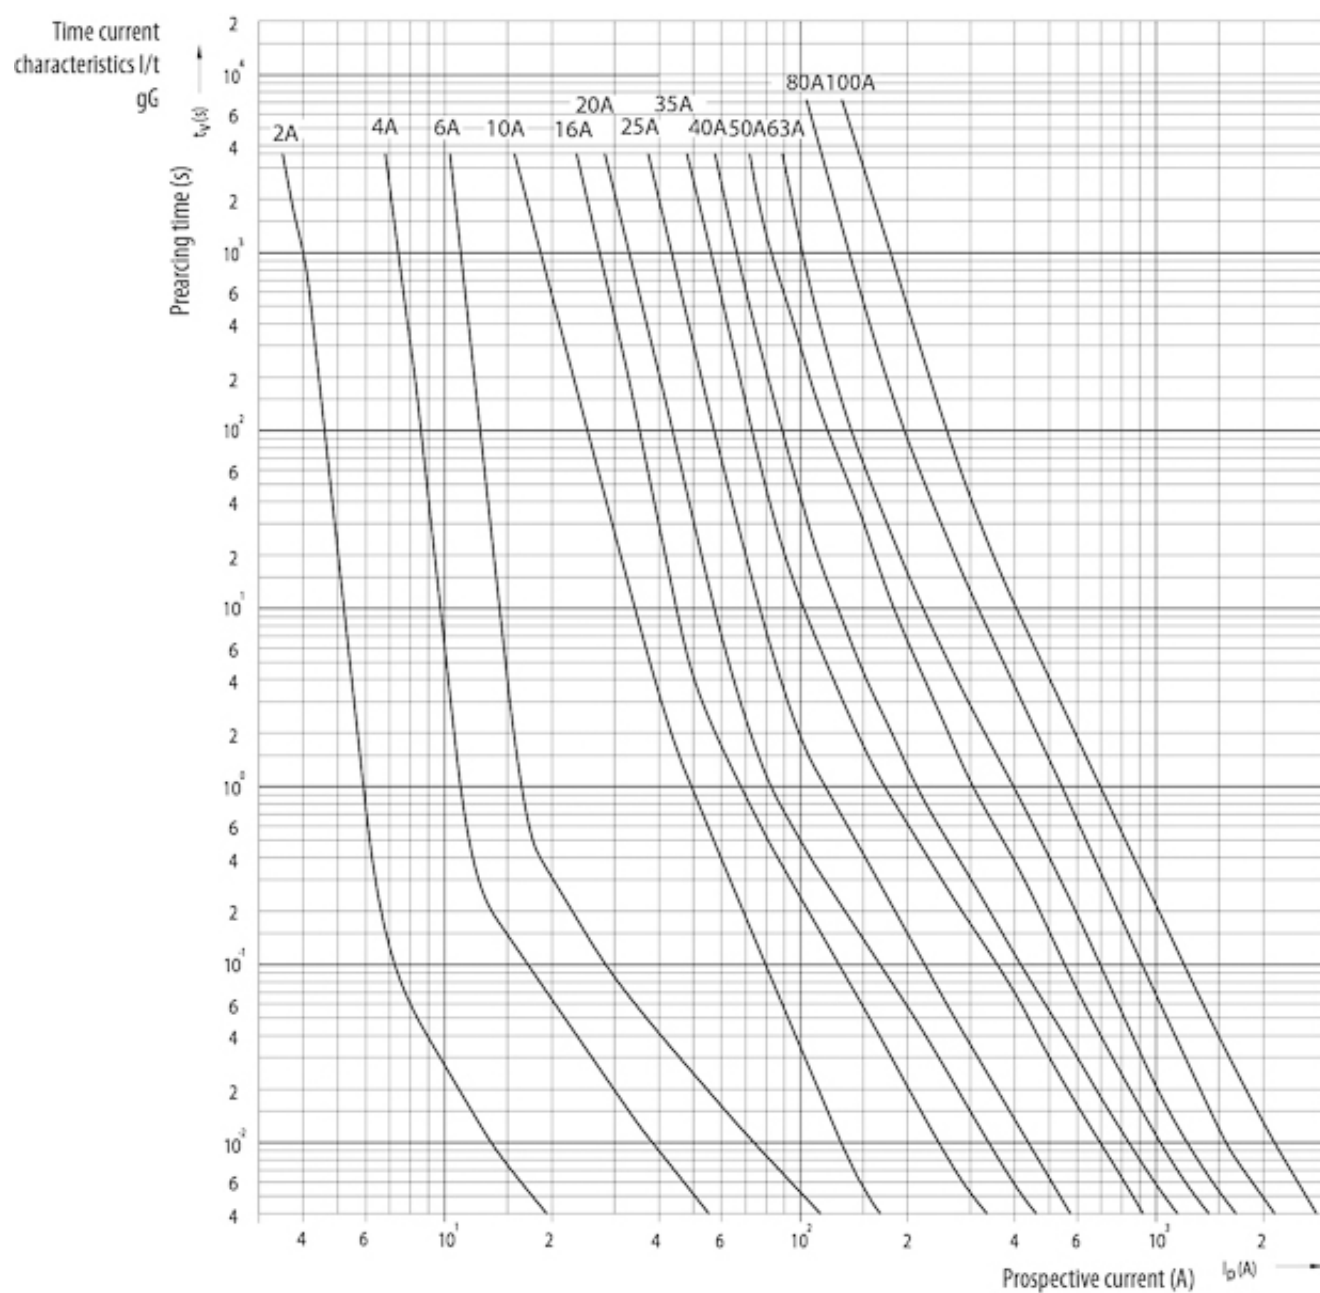

Dimension drawing

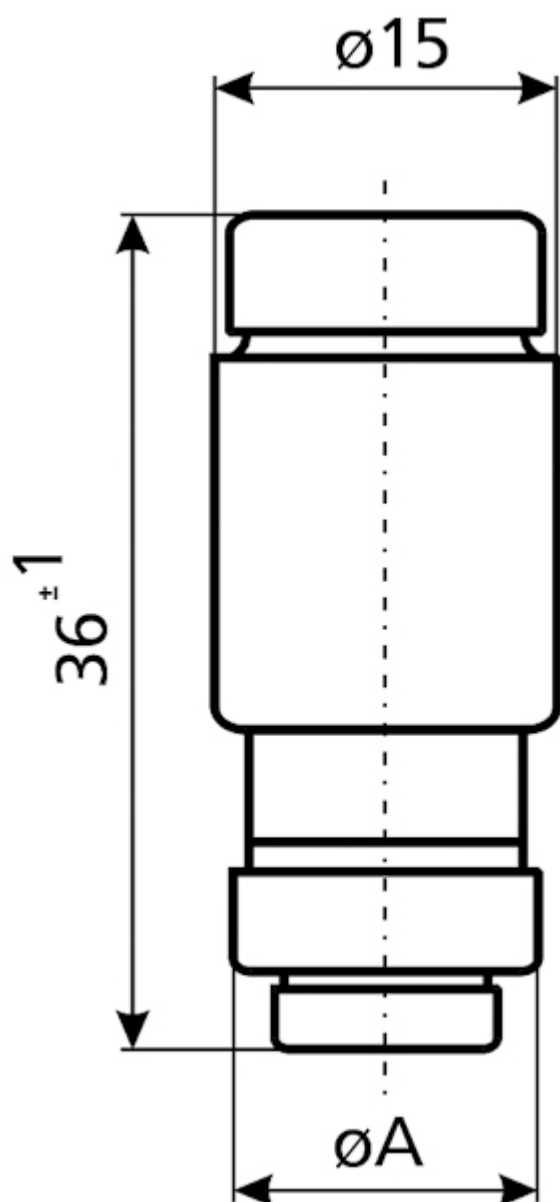

I_n [A]	$\varnothing A$
20	10,9
25	12,1
32	13,3
35	13,3
40	13,3
50	14,5
63	15,9

Cut-off current characteristics

Cut-off current characteristics

