
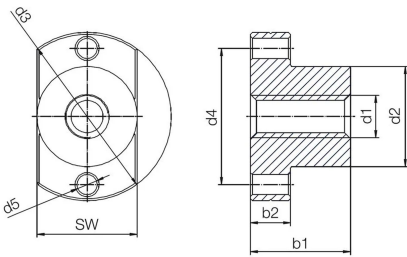


drylin® flange lead screw nut with spanner flat,
trapezoidal thread, J350FLM

J350FLM-282835TR12X3



drylin® flange lead screw nut with spanner flat,
trapezoidal thread, J350FLM

- Material: iglide® J350
- Thread direction: Left-hand thread
- Thread type: Trapezoidal threads
- Design: Standard
- Cylindrical lead screw nut with flange
- With spanner flat

Product description

Introducing the drylin® flange lead screw nut with spanner flat, J350FLM from igus. Made from high-performance iglidur® J350 material, this nut is designed for medium to high temperatures, offering stability up to +150°C. Its trapezoidal thread and robust design ensure reliable performance, making it ideal for various applications, including the railway industry. Enjoy lubrication-free and maintenance-free operation, along with excellent wear resistance and quiet, vibration-free travel.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	Yes
---	-----

Thermal properties

Efficiency [η]	24-34
----------------	-------

General properties

Thread direction	Left-hand thread
Thread type	Trapezoidal threads; absorption of larger axial forces
With spanner flat	Yes
Weight	136.8 g



Dimensions

Thread size	TR12X3
Ø d1	12 mm
Ø d2	28 mm
Ø d3	48 mm
Ø d4	38 mm
Ø d5	6 mm
b1	35 mm
b2	12 mm