


drylin® trapezoidal lead screw nut with flange,
multi start, J350FLM

J350FLM-2835TR12X6P3

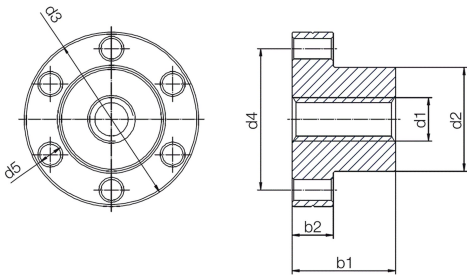

drylin® trapezoidal lead screw nut with flange,
multi start, J350FLM

- Material: iglide® J350
- Thread direction: Left-hand thread
- Thread type: Trapezoidal threads
- Design: Standard
- Cylindrical lead screw nut with flange
- Multi start

Product description

Introducing the drylin trapezoidal lead screw nut with flange, model J350FLM, by igus. Made from high-performance iglidur J350 polymer, this durable nut is designed for high-temperature applications, withstanding up to +150°C. Its dimensionally stable design ensures reliable performance, making it ideal for the railway industry. Enjoy a lubrication-free experience with excellent wear resistance and low friction, perfect for medium loads. Upgrade your systems with this robust, maintenance-free solution.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	No
---	----

Thermal properties

Efficiency [η]	37-47
----------------	-------

General properties

Thread direction	Left-hand thread
Thread type	Trapezoidal threads; absorption of larger axial forces
With spanner flat	No
Weight	121.6 g



Dimensions

Thread size	TR12X6P3
Ø d1	12 mm
Ø d2	28 mm
Ø d3	48 mm
Ø d4	38 mm
Ø d5	6 mm
b1	35 mm
b2	12 mm