


drylin® flange lead screw nut with spanner flat,
trapezoidal thread, J350FRM

J350FRM-202020TR8X1.5

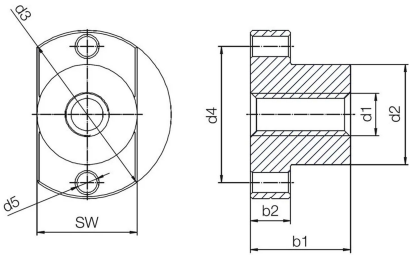

drylin® flange lead screw nut with spanner flat,
trapezoidal thread, J350FRM

- Material: iglide® J350
- Thread direction: Right-hand thread
- Thread type: Trapezoidal threads
- Design: Standard
- Cylindrical lead screw nut with flange
- With spanner flat

Product description

Introducing the drylin flange lead screw nut with spanner flat, designed for high-performance applications. Made from iglidur J350, this durable lead screw nut withstands temperatures up to +150°C, making it ideal for medium to high heat environments. Its robust, lubrication-free design ensures quiet and vibration-free operation while offering excellent wear resistance. Perfect for the railway industry, this nut combines reliability and efficiency for long-term use. Choose the J350FRM for your next project.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	Yes
---	-----

Thermal properties

Efficiency [η]	19-26
----------------	-------

General properties

Thread direction	Right-hand thread
Thread type	Trapezoidal threads; absorption of larger axial forces
With spanner flat	Yes
Weight	11.77 g



Dimensions

Thread size	TR08X1.5
Ø d1	8 mm
Ø d2	20 mm
Ø d3	36 mm
Ø d4	28 mm
Ø d5	4 mm
b1	20 mm
b2	8 mm