


drylin® R linear slide bearing RJ200UI, imperial
RJ200UI-01-10

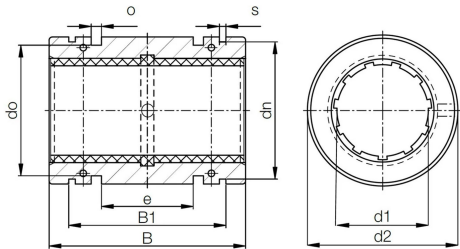

drylin® R linear slide bearing RJ200UI, imperial

- Anodized aluminum adapter
- Dimensionally interchangeable with linear ball bearings
- Equipped with liner made of iglidur® J200
- Temperature range -40°F to +194°F (-40°C to +90°C) J200UI-01 (standard)
- Ideal for aluminum shafting

Ø dn	1.06 in
B1	1.124 in
o	0.125 in
B	1.5 in
Ø d1	0.625 in
e	0.312 in
s	0.062 in
Ø d2	1.125 in
Ø do	0.962 in

Product description

Introducing the drylin R linear slide bearing RJ200UI, a premium solution for smooth motion. Featuring an anodized aluminum adapter, it is dimensionally interchangeable with linear ball bearings. The liner made of iglidur J200 ensures durability, operating efficiently in a temperature range from -40°F to +194°F. Perfectly suited for aluminum shafting, this bearing combines versatility and reliability for your engineering needs.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	No
---	----

Manufacturing and installation tolerances

d1 tolerance	+0.006 +0.046mm, F10
d2 tolerance	h7
B tolerance	h10
Housing bore (min.)	1.125 in
Housing bore (max.)	1.258 in
o tolerance	+0.004 inch

General properties

Sliding element material	igidur_j200
--------------------------	-------------



Dimensions

Ø d1	0.625 in
Ø d2	1.125 in
B	1.5 in
B1	1.124 in
s	0.062 in
Ø dn	1.06 in
Ø do	0.962 in
o	0.125 in
e	0.312 in