



SERVICE PARTS LIST


BULLETIN NO.
54-38-2332

SPECIFY CATALOG NO. AND SERIAL NO. WHEN ORDERING PARTS			REVISED BULLETIN	DATE
4.5" COMPACT ANGLE GRINDER with PADDLE SWITCH			54-38-2331	Aug. 2022
CAT. NO.	6142-31	STARTING SERIAL NUMBER	WIRING INSTRUCTION See Reverse Side	
		H41C		

FIG.	PART NO.	DESCRIPTION OF PART	NO. REQ.
1	05-88-1650	M4 x 25mm Pan Hd. ST Screw T-20	(4)
2	42-62-0120	Side Handle Assembly	(1)
3	14-30-0083	Gear Case Assembly	(1)
3g	02-04-0620	Ball Bearing	(1)
4	34-40-0180	O-Ring	(1)
★ 5	14-73-0462	Spindle Hub Assembly	(1)
5d		Steel Pin	(1)

★ = Part number change

from previous
service
parts list.

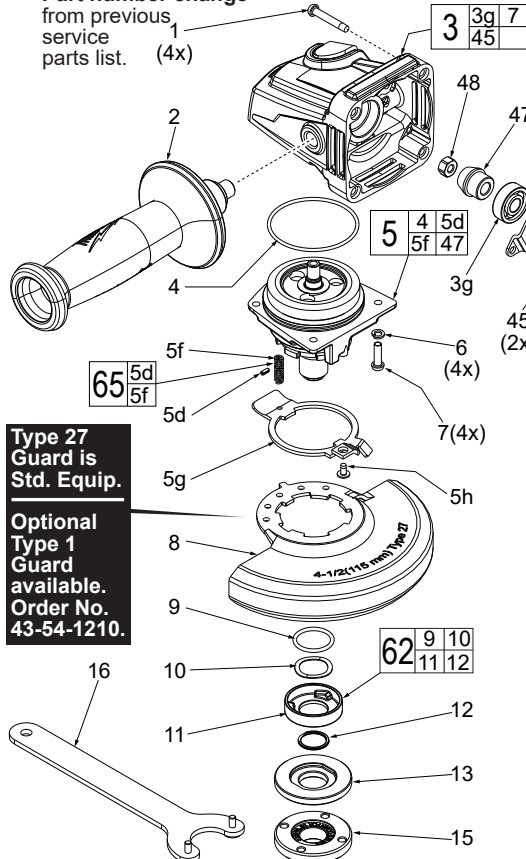

Type 27
Guard is
Std. Equip.

Optional
Type 1
Guard
available.
Order No.
43-54-1210.

00 0

EXAMPLE:
Component Parts (Small #)
Are Included When Ordering
The Assembly (Large #).

FIG.	PART NO.	DESCRIPTION OF PART	NO. REQ.
5f		Spring	(1)
5g	44-20-0155	Guard Locking Tang	(1)
5h	05-81-0020	M3 x 5mm Pan Hd. ST T-8 Screw	(1)
6	05-90-0225	Spring Washer	(6)
7	05-78-5316	M4 x 14mm Pan Hd. Tapt. T-20 Screw	(4)
8	43-54-1200	4.5" Type 27 Guard (Standard Equip.)	(1)
9		O-Ring	(1)
10		Wavey Spring	(1)
11		Flange with Ramps	(1)
12		Retaining Ring	(1)
13	43-34-0935	Inner Disc Flange	(1)
15	44-40-0035	Outer Flange Nut	(1)
16	49-96-7215	Spanner Wrench	(1)
21	05-88-1300	M4 x 28mm Pan Hd. ST T-20 Screw	(2)
22	05-88-1200	M4 x 16mm Pan Hd. ST T-20 Screw	(2)
23	44-76-0095	Cord Protector	(1)
24	22-64-2021	Power Cord	(1)
26	22-09-0720	PCBA	(1)
27	23-66-2665	On-Off Switch	(1)
28	23-74-1620	Brass Terminal	(1)
29	23-74-1615	Brass Terminal	(1)
32	22-18-2240	Carbon Brush Assembly (Set of 2)	(2)
33	05-88-0030	M3 x 8.5mm Pan Hd. ST T-10 Screw	(1)
34		Motor Housing	(1)
35	23-16-0075	Foam Block	(1)
36		Handle Support, Left Handle Halve	(1)
37	22-56-0150	Closed End Wire Connector	(1)
38		Handle Cover, Right Handle Halve	(1)
39	18-07-0315	Field Assembly	(1)
39a		Field Halve	(1)


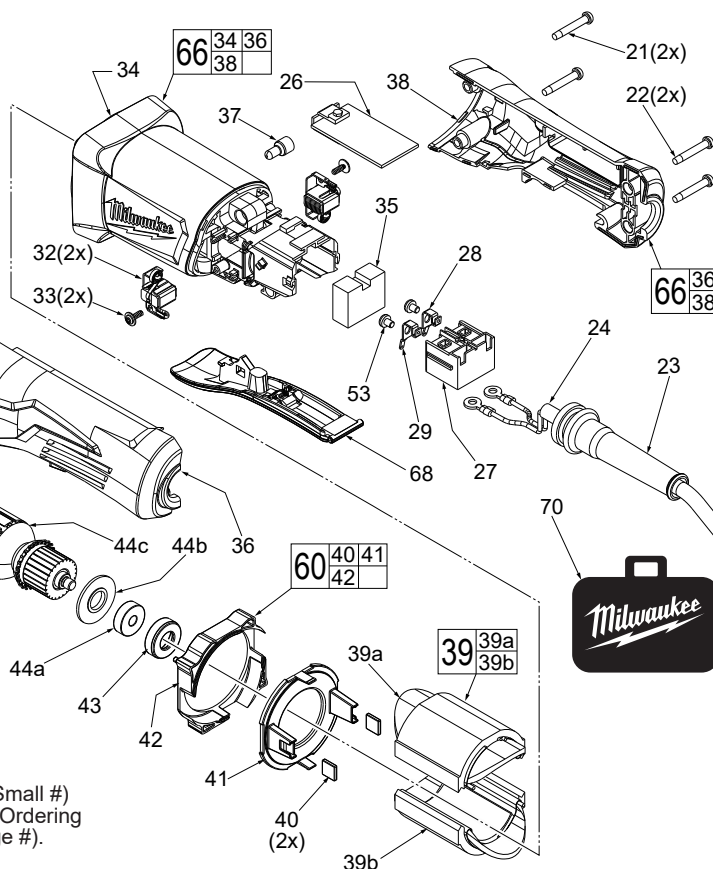


FIG.	PART NO.	DESCRIPTION OF PART	NO. REQ.
39b		Field Halve	(1)
40	42-28-0085	Rubber Block	(2)
41		Baffle Foot	(1)
42		Baffle	(1)
43	42-96-0405	Rubber Bearing Cap	(1)
44	16-10-0850	Armature Assembly	(1)
44a	02-04-2110	Ball Bearing	(1)
44b	31-86-0090	Plastic Disc	(1)
44c		Armature	(1)
44d	45-88-0406	Washer	(1)
45	05-78-0105	M4 x 10mm Pan Hd. Tapt. T-20 Screw	(2)
46	44-86-0155	Bearing Retainer	(1)
★ 47		Pinion	(1)
48	05-55-0620	M5 Hex Nut	(1)
49	12-20-6142	Service Nameplate (Not Shown)	(1)
50	10-20-6142	Warning Label (Not Shown)	(1)
53	05-78-0305	M3.5 x 7mm Pan Hd. Phillips Screw	(2)
60	42-14-0520	Baffle Assembly	(1)
61	44-86-0145	Bearing Retaining Plate Assembly	(1)
62	14-46-6105	Flange with Ramps Assembly	(1)
65	14-46-0241	Spring/Pin Kit	(1)
66	31-50-6140	Handle/Motor Housing Service Kit	(1)
68	31-92-0210	Paddle Trigger Assembly	(1)
70	42-55-6148	Canvas Tool Bag (Optional)	(1)

FIG. LUBRICATION


Use Type 'Y' Grease, No. 49-08-5270
3,5,47 When servicing the Gear Case Assembly (3), Pinion (47) or the Spindle Hub Assembly (5):
90-95% of the old grease must be removed prior to any new grease being added. Be sure that all gear teeth are heavily coated when reassembling.

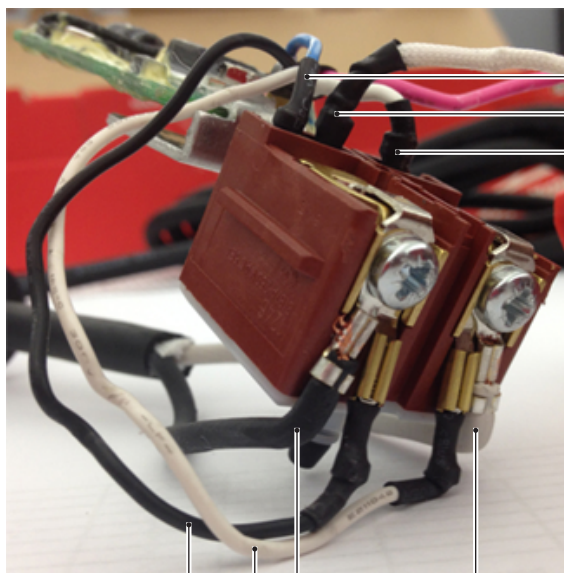

Blue from PCBA
White from bottom right Field
White (thick) from PCBA

Black from PCBA
White (thin) from PCBA
Black from Power Cord
White from Power Cord

Route and trap wires as shown in the illustrations below. Be sure to place all components firmly and squarely in handle half cavities. Be sure the wires are pushed to the bottom of wire traps. Check for any interferences prior to installing the handle cover. Check for proper switch and lock movement before activating the tool.

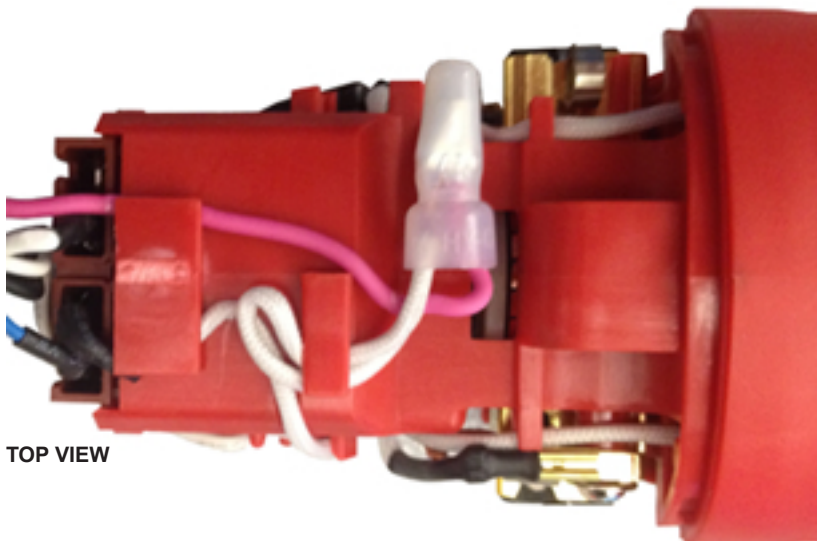


TOP VIEW



HANDLE SUPPORT (Left Handle Halve)

Install all components and route wires here before securing with Handle Cover.

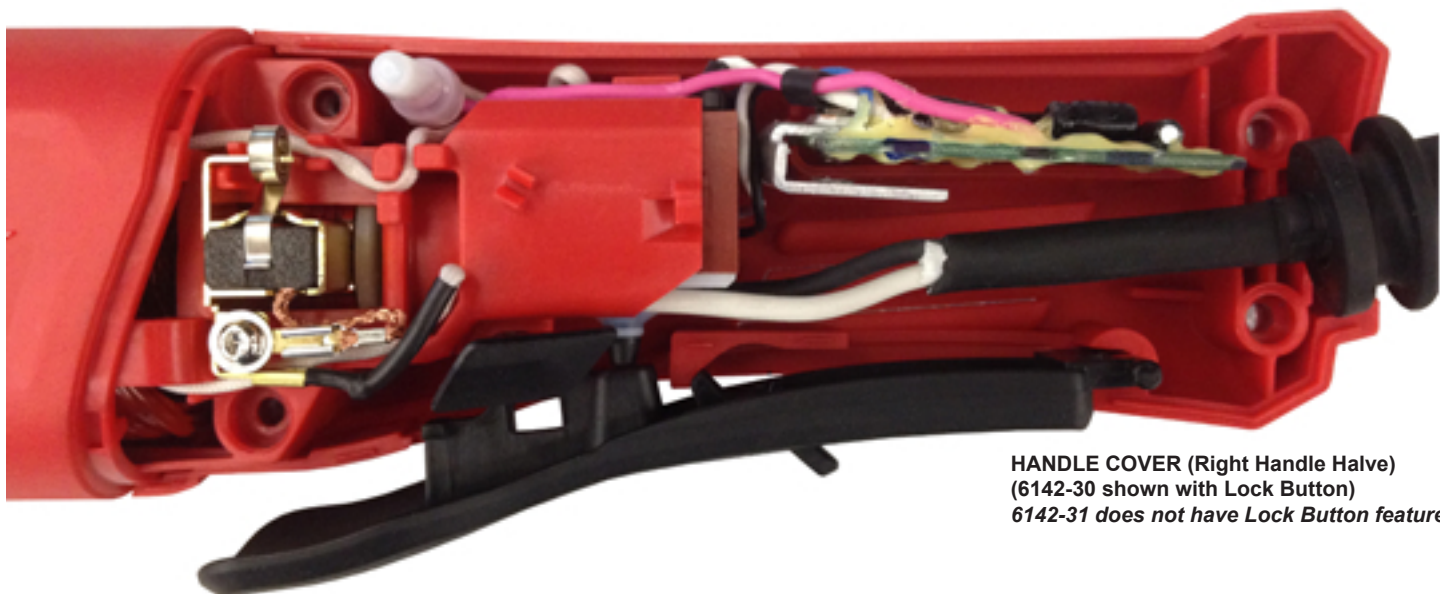

HANDLE COVER (Right Handle Halve)
(6142-30 shown with Lock Button)
6142-31 does not have Lock Button feature